

10-23-00

A

PTO/SB/05 (08-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Please type a plus sign (+) inside this box  Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control numberUTILITY
PATENT APPLICATION
TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

NPA059US

First Inventor

PAUL LAPSTUN

Title

METHOD AND SYSTEM FOR DEVICE CONTROL

Express Mail Label No.

EK285768940US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Applicant claims small entity status.
See 37 CFR 1.27.
3. ☒ Specification [Total Pages **42**]
(preferred arrangement set forth below)
- Descriptive title of the invention
 - Cross Reference to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to sequence listing, a table, or a computer program listing appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
4. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets **29**]
5. Oath or Declaration [Total Pages **3**]
- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63 (d))
(for continuation/divisional with Box 17 completed)
- i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b)
6. ☐ Application Data Sheet. See 37 CFR 1.76

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

7. ☐ CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)
8. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
- a. ☐ Computer Readable Form (CRF)
- b. Specification Sequence Listing on:
- i. ☐ CD-ROM or CD-R (2 copies); or
- ii. ☐ paper
- c. ☐ Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☒ Assignment Papers (cover sheet & document(s))
10. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
13. ☐ Preliminary Amendment
14. ☐ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
15. ☒ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)

of prior application No.

Prior application information

Examiner

Group / Art Unit

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

24011

or ☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name

KIA SILVERBROOK

Address

393 Darling Street,

City

Balmain

State

NSW

Zip Code

2041

Country

Australia

Telephone

+61-2-9818-6633

Fax


+61-2-9819-6711

Name (Print/Type)

KIA SILVERBROOK

Registration No. (Attorney/Agent)

Signature



Date October 18, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

FEE TRANSMITTAL for FY 2001

Patent fees are subject to annual revision.

TOTAL AMOUNT OF PAYMENT

(\$) 721

Complete if Known

Application Number

Filing Date

First Named Inventor

PAUL LAPSTUN

Examiner Name

Group Art Unit

Attorney Docket No.

NPA059US

METHOD OF PAYMENT

1. ☐ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit
Account
Number

Deposit
Account
Name

☐ Charge Any Additional Fee Required
Under 37 CFR 1.16 and 1.17

☐ Applicant claims small entity status.
See 37 CFR 1.27

2. ☒ Payment Enclosed:

☒ Check ☐ Credit card ☐ Money
Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity Small Entity

Fee Fee Fee Fee Fee Description

Code (\$) Code (\$) Code (\$) Code (\$)

101 710 201 355 Utility filing fee

106 320 206 160 Design filing fee

107 490 207 245 Plant filing fee

108 710 208 355 Reissue filing fee

114 150 214 75 Provisional filing fee

Fee Paid

355

SUBTOTAL (1) (\$) 355

2. EXTRA CLAIM FEES

Total Claims 34 -20** = 14 X Fee from below 9 = 126
Independent Claims 6 -3** = 3 X 40 = 120
Multiple Dependent =

Large Entity Small Entity

Fee Fee Fee Fee Fee Description

Code (\$) Code (\$) Code (\$) Code (\$)

103 18 203 9 Claims in excess of 20

102 80 202 40 Independent claims in excess of 3

104 270 204 135 Multiple dependent claim, if not paid

109 80 209 40 ** Reissue independent claims
over original patent

110 18 210 9 ** Reissue claims in excess of 20
and over original patent

SUBTOTAL (2) (\$) 246

**or number previously paid, if greater; For Reissues, see above

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity Small Entity

Fee Fee Fee Fee Fee Description

Code (\$) Code (\$) Code (\$) Code (\$)

105 130 205 65 Surcharge - late filing fee or oath

127 50 227 25 Surcharge - late provisional filing fee or
cover sheet

139 130 139 130 Non-English specification

147 2,520 147 2,520 For filing a request for ex parte reexamination

112 920* 112 920* Requesting publication of SIR prior to
Examiner action

113 1,840* 113 1,840* Requesting publication of SIR after
Examiner action

115 110 215 55 Extension for reply within first month

116 390 216 195 Extension for reply within second month

117 890 217 445 Extension for reply within third month

118 1,390 218 695 Extension for reply within fourth month

128 1,890 228 945 Extension for reply within fifth month

119 310 219 155 Notice of Appeal

120 310 220 155 Filing a brief in support of an appeal

121 270 221 135 Request for oral hearing

138 1,510 138 1,510 Petition to institute a public use proceeding

140 110 240 55 Petition to revive - unavoidable

141 1,240 241 620 Petition to revive - unintentional

142 1,240 242 620 Utility issue fee (or reissue)

143 440 243 220 Design issue fee

144 600 244 300 Plant issue fee

122 130 122 130 Petitions to the Commissioner

123 50 123 50 Petitions related to provisional applications

126 240 126 240 Submission of Information Disclosure Stmt

581 40 581 40 Recording each patent assignment per
property (times number of properties) 120

146 710 246 355 Filing a submission after final rejection
(37 CFR § 1.129(a))

149 710 249 355 For each additional invention to be
examined (37 CFR § 1.129(b))

179 710 279 355 Request for Continued Examination (RCE)

169 900 169 900 Request for expedited examination
of a design application

Other fee (specify)

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$) 120

SUBMITTED BY

Name (Print/Type)

Kia Silverbrook


Registration No.
(Attorney/Agent)

Complete (if applicable)

Telephone

+61-2-9818-6633

Signature



Date

October 18, 2000

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS SEND TO Assistant Commissioner for Patents, Washington, DC 20231.

METHOD AND SYSTEM FOR DEVICE CONTROL

FIELD OF INVENTION

The present invention relates generally to device control and, more particularly, to a method and system for enabling electrical or electronic devices to be controlled through distributed computing systems. It has specific application to the operation of a device involving a printed form-based user interface.

CO-PENDING APPLICATIONS

Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention simultaneously with the present invention:

NPA011US, NPA031US, NPA040US, NPA046US, NPA053US, NPA059US,
NPA064US, NPB006US, NPS004US, NPS008US, NPS013US, NPS024US,
NPPC1, UP01US, UP02US, UP03US, UP04US, UP05US

The disclosures of these co-pending applications are incorporated herein by cross-reference. Each application is temporarily identified by its docket number. This will be replaced by the corresponding USSN when available.

Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention on 15 September 2000:

NPA024US, NPA025US, NPA047US, NPA049US

The disclosures of these co-pending applications are incorporated herein by cross-reference. Each application is temporarily identified by its docket number. This will be replaced by the corresponding USSN when available.

Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention on 30 June 2000:

NPA014US, NPA015US, NPA022US, NPA026US, NPA038US, NPA041US,
NPA050US, NPA051US, NPA052US, NPA063US, NPA065US, NPA067US,
NPA068US, NPA069US, NPA071US, NPA072US, NPB003US, NPB004US,
NPB005US, NPP019US, PEC04US, PEC05US, PEC06US, PEC07US

The disclosures of these co-pending applications are incorporated herein by cross-reference. Each application is temporarily identified by its docket number. This will be replaced by the corresponding USSN when available.

Various methods, systems and apparatus relating to the present invention are
5 disclosed in the following co-pending applications filed by the applicant or assignee of the present invention on 23 May 2000:

10 NPA001US, NPA002US, NPA004US, NPA005US, NPA006US, NPA007US,
NPA008US, NPA009US, NPA010US, NPA012US, NPA016US, NPA017US,
NPA018US, NPA019US, NPA020US, NPA021US, NPA030US, NPA035US,
NPA048US, NPA075US, NPB001US, NPB002US, NPK002US, NPK003US,
NPK004US, NPK005US, NPM001US, NPM002US, NPM003US, NPM004US,
NPN001US, NPP001US, NPP003US, NPP005US, NPP006US, NPP007US,
NPP008US, NPP016US, NPP017US, NPP018US, NPS001US, NPS003US,
NPS020US, NPT001US, NPT002US, NPT003US, NPT004US, NPX001US,
15 NPX003US, NPX008US, NPX011US, NPX014US, NPX016US, IJ52US,
IJM52US, MJ10US, MJ11US, MJ12US, MJ13US, MJ14US,
MJ15US, MJ34US, MJ47US, MJ58US, MJ62US, MJ63US,
PAK04US, PAK05US, PAK06US, PAK07US, PAK08US, PEC01US,
20 PEC02US, PEC03US

The disclosures of these co-pending applications are incorporated herein by cross-reference. Each application is temporarily identified by its docket number. This will be replaced by the corresponding USSN when available.

BACKGROUND

There are many electrical and electronic devices in the home and office which have some kind of user interface for controlling their operation. These include office equipment, audio and video equipment, kitchen appliances, heating and cooling systems, etc. Even light sockets have on/off switches and sometimes dimmers, and in many countries power outlets have on/off switches.

Office equipment and entertainment equipment is increasingly networkable - i.e. devices come with interfaces to standard local-area networks, allowing their operation to be controlled over a network. The advent of standard wireless networking technologies such as Bluetooth may see an increase in networking support in such devices and appliances.

Some networking futurists predict that even light sockets will one day be networked, allowing their status to be queried and their function to be controlled remotely.

Even today, an increasing number of devices can be controlled via infrared remote control interfaces. Such interfaces are particularly prevalent on audio and video equipment and heating and cooling systems.

SUMMARY OF INVENTION

It is an objective of the present invention to provide a new method and system for enabling devices to be controlled through a computer system.

In a first aspect, the present invention provides for a method of enabling a device to be controlled in which the device is operative to perform at least one function in response to control instructions from a computer system, the method including the steps of

providing a control interface containing information relating to the device function, the control interface including coded data indicative of an identity of the control interface and of at least one reference point of the control interface;

receiving, in the computer system, indicating data from a sensing device regarding the identity of the control interface and a position of the sensing device relative

to the control interface, the sensing device, when placed in an operative position relative to the control interface, sensing the indicating data using at least some of the coded data; and

effecting, in the computer system and from the indicating data, an operation
5 relating to at least one parameter of the control instructions.

In a second aspect, the present invention provides for a method of enabling a device to be controlled in which the device is operative to perform at least one function in response to control instructions from a computer system, the method including the steps of

10 providing a control interface containing information relating to the device function, the control interface including coded data indicative of at least one parameter of the control instructions;

receiving, in the computer system, data from a sensing device relating to said at least one parameter and regarding movement of the sensing device relative to the control
15 interface, the sensing device, when moved relative to the control interface, sensing the data regarding said at least one parameter using at least some of the coded data and generating the data regarding its own movement relative to the control interface; and

interpreting, in the computer system, said movement of the sensing device as it relates to said at least one parameter.

20 In a third aspect, the present invention provides for a method of enabling a device to be controlled in which the device is operative to perform at least one function in response to control instructions from a computer system, the method including the steps of

providing a user with a control interface including coded data indicative of an
25 identity of the control interface;

receiving, in the computer system, data from a sensing device regarding an identity of the user and regarding the identity of the control interface, the sensing device containing the data regarding the identity of the user and sensing the data regarding the identity of the control interface using at least some of the coded data; and

30 effecting, in the computer system and from the data regarding the identity of

the user and the identity of the control instruction, an operation relating to at least one parameter of the control instructions.

In a fourth aspect, the present invention provides for a system for enabling at least one function of a device to be controlled, the system including

- 5 a control interface containing information relating to the device function, the control interface including coded data indicative of an identity of the control interface and of at least one reference point of the control interface; and

- 10 a computer system incorporating control instructions operative to cause said device to perform said function and operative to receive indicating data from a sensing device for effecting an operation relating to at least one parameter of the control instructions, the indicating data being indicative of the identity of the control interface and a position of the sensing device relative to the control interface, the sensing device sensing the indicating data using at least some of the coded data.

- 15 In a fifth aspect, the present invention provides for a system for enabling at least one function of a device to be controlled in response to control instructions, the system including

 a control interface containing information relating to the device function, the control interface including coded data indicative of at least one parameter of the control instructions; and

- 20 a computer system incorporating said control instructions, and operative to receive data from a sensing device regarding said at least one parameter and regarding movement of the sensing device relative to the control interface, and for interpreting said movement of the sensing device as it relates to said at least one parameter, the sensing device, when moved relative to the control interface, sensing the data regarding said at
25 least one parameter using at least some of the coded data and generating the data regarding its own movement relative to the control interface.

In a sixth aspect, the present invention provides for a system for enabling at least one function of a device to be controlled, the system including

- 30 a control interface including coded data indicative of an identity of the control interface; and

a computer system incorporating control instructions to cause said device to perform said function, and operative to receive from a sensing device data regarding an identity of the user and the identity of the control interface, and for effecting, from said received data, an operation relating to a parameter of said control instructions, the
5 sensing device containing the data regarding the identity of the user and sensing the data regarding the identity of the control interface using at least some of the coded data.

Accordingly, the present invention provides a system and a method which utilizes one or more device control interfaces capable of interacting with a computer system to control at least one function of at least one device. Whilst the novel method
10 and system of the present invention may be used in conjunction with a single computer system, in a particularly preferred form it is designed to operate over a computer network, such as the Internet.

Physically, the device control interface is disposed on a surface medium which may be of any suitable structure. However, in a preferred arrangement, the form
15 comprises sheet material such as paper or the like which has the coded data printed on it and which allows it to interact with the computer system. The coded data is detectable preferably, but not exclusively, outside the visible spectrum, thereby enabling it to be machine-readable but substantially invisible to the human eye. The device control may also include visible material which provides information to a user, such as the
20 application or purpose of the device control, and which visible information may be registered or correlate in position with the relevant hidden coded data.

The system also includes a sensing device to convey data from the device control to the computer system, and in some instances, to contribute additional data. Again, the sensing device may take a variety of forms but is preferably compact and
25 easily portable. In one arrangement, the sensing device is configured as a pen which is designed to be able to physically mark the interactive form as well as to selectively enable the coded data from the form to be read and transmitted to the computer system. The coded data then provides control information, configured such that designation thereof by a user causes instructions to be applied to the software running on the
30 computer system or network. Alternatively, the sensing device may be embedded in a ring, hand glove or finger glove worn by a user. It could also be embedded in custom

eyewear, with interaction controlled by gaze.

The nature of the interaction between the device control interface and the sensing device and the data that each contributes to the computer system may vary. In one arrangement, the coded data on the form is indicative of the identity of the form and
5 of at least one reference point on that form. In another embodiment, the interactive form includes coded data which is indicative of a parameter of the form, whereas the sensing device is operative to provide data regarding its own movement relative to that form to the computer system together with coded data from the form. In yet another arrangement, the form includes the coded data which at least identifies the form, and the sensing
10 device is designed to provide, to the computer system, data based on the form coded data, and also on data which identifies the user of the device.

The system and method also preferably employs specially designed printers to print the control devices. Further these printers constitute or form part of the computer system and are designed to receive data from the sensing device. As indicated above, the
15 system and method of the invention is ideally suited to operate over a network. In this arrangement, the printers are fully integrated into the network and allow for printing of the interactive forms on demand and also for distributing of the forms using a mixture of multi-cast and point-cast communication protocols.

The present invention therefore provides a novel system and method for
20 enabling electrical or electronic devices to be controlled through a computer system making use of novel interactive surface media. The invention is applicable where a particular device is able to be remotely controlled, either via a network interface or an infrared interface. In these circumstances it is possible to completely separate the user interface to the device from the device itself and the user interface can then be
25 implemented in the forms mentioned above and sensed by a sensing device carried by the user.

The device control interface preferably identifies the device, and is printed with the user interface of the device in the form of buttons etc. Being passive, the surface gives no feedback to the user as to the status of the device or its user interface. Feedback
30 can, however, be provided via the sensing device if necessary. The computer system resolves operations on the control interface with reference to a user interface structure

previously selected by the user from the device itself or its manufacturer, or designed by the user using elements provided by the device or its manufacturer.

User interfaces implemented in this way have several advantages:

- once the infrastructure is in place, the cost of manufacturing the user interface is removed from the cost of manufacturing each particular device; as an example, even the cost of the traditional user interface to a light socket (i.e. both the wiring and the switch) is non-trivial;
- a user interface can be replicated by simply printing another copy
- when a user interface becomes damaged it can be easily replaced
- when the firmware in a device is updated, a new user interface can be easily provided
- a user interface can be customized by arranging elements and printing the result
- a user interface with a particular style can be chosen from an available set; for example, some users may prefer larger icons or a simplified function set
- multiple user interfaces can be grouped together
- a user interface can be provided on the device itself by the same means; i.e. pre-printed and attached to the device, or printed directly onto the device surface
- access to individual user interfaces and functions can be controlled, since each sensing device is tied to a particular user's identity.

As one example, a device control interface according to a preferred aspect of the invention can be printed onto or attached to the surface of a toy to provide the user interface to the toy. An appropriate sensing device can then be used to interact with the user interface, communicating by wire or wirelessly to either a personal computer, game console, or a processor embedded in the toy itself, to produce graphical output, sound effects and other behavior. For example, a toy sit-in submarine may have a large user interface containing dozens of submarine controls. The toy comes with a CD-ROM containing an associated interactive game which runs on a PC or game console. The game is driven by the user interface contained in the submarine, perhaps mediated by a

- sensing device in the form of a glove which communicates wirelessly by Bluetooth with standard Bluetooth hardware in the PC or game console. The PC screen or console-connected television monitor provides the animated part of the user interface. The device control interface provides the extended user interface. Toys can be customized by
- 5 selecting different user interfaces and custom user interfaces can be created by assembling pre-defined user interface components.

BRIEF DESCRIPTION OF DRAWINGS

Preferred and other embodiments of the invention will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

- 5 Figure 1 is a schematic of a the relationship between a sample printed netpage and its online page description;

Figure 2 is a schematic view of a interaction between a netpage pen, a netpage printer, a netpage page server, and a netpage application server;

- 10 Figure 3 is a schematic view of a high-level structure of a printed netpage and its online page description;

Figure 4a is a plan view showing a structure of a netpage tag;

Figure 4b is a plan view showing a relationship between a set of the tags shown in Figure 4a and a field of view of a netpage sensing device in the form of a netpage pen;

Figure 5a is a plan view showing an alternative structure of a netpage tag;

- 15 Figure 5b is a plan view showing a relationship between a set of the tags shown in Figure 5a and a field of view of a netpage sensing device in the form of a netpage pen;

Figure 5c is a plan view showing an arrangement of nine of the tags shown in Figure 5a where targets are shared between adjacent tags;

- 20 Figure 5d is a plan view showing the interleaving and rotation of the symbols of the four codewords of the tag shown in Figure 5a;

Figure 6 is a schematic view of a set of user interface flow document icons;

Figure 7 is a schematic view of a set of user interface page layout element icons;

Figure 8 is a schematic view of device control interactions;

Figure 9 is a schematic view of a device control class diagram;

- 25 Figure 10 is a schematic view of a default device class diagram;

Figure 11 is a schematic view of a device information class diagram;

Figure 12 is a schematic view of a device channel class diagram;

Figure 13 is a schematic view of a remote control class diagram;

Figure 15 is a schematic view of a program schedule class diagram;

Figure 16 is a schematic view of a device setup user interface flow;

Figure 17 is a schematic view of a setup details user interface flow;

5 Figure 18 is a schematic view of a device list user interface flow;

Figure 19 is a schematic view of an add device user interface flow;

Figure 20 is a schematic view of a record program user interface flow;

Figure 21 is a detailed view of a device setup main page;

Figure 22 is a schematic view of a device setup details;

10 Figure 23 is a schematic view of a device list;

Figure 24 is a schematic view of a universal remote control form;

Figure 25 is a schematic view of a device specific TV remote control;

Figure 26 is a schematic view of a universal remote control;

Figure 27 is a schematic view of a select manufacturer list;

15 Figure 28 is a schematic view of a select device type list;

Figure 29 is a schematic view of a select model list;

Figure 30 is a schematic view of a set defaults form; and

Figure 31 is a schematic view of a program schedule.

DETAILED DESCRIPTION OF PREFERRED AND OTHER EMBODIMENTS

Note: Memjet™ is a trademark of Silverbrook Research Pty Ltd, Australia.

In the preferred embodiment, the invention is configured to work with the netpage networked computer system, a summary of which is given below and a detailed description of which is given in our earlier applications, including in particular applications USSN 09/_____ (docket no. NPT002US), USSN 09/_____ (docket no. NPS001US), USSN 09/_____ (docket no. NPP003US), USSN 09/_____ (docket no. NPA002US) and USSN 09/_____ (docket no. IJ52US). It will be appreciated that not every implementation will necessarily embody all or even most of the specific details and extensions described in these applications in relation to the basic system. However, the system is described in its most complete form to assist in understanding the context in which the preferred embodiments and aspects of the present invention operate.

In brief summary, the preferred form of the netpage system employs a computer interface in the form of a mapped surface, that is, a physical surface which contains references to a map of the surface maintained in a computer system. The map references can be queried by an appropriate sensing device. Depending upon the specific implementation, the map references may be encoded visibly or invisibly, and defined in such a way that a local query on the mapped surface yields an unambiguous map reference both within the map and among different maps. The computer system can contain information about features on the mapped surface, and such information can be retrieved based on map references supplied by a sensing device used with the mapped surface. The information thus retrieved can take the form of actions which are initiated by the computer system on behalf of the operator in response to the operator's interaction with the surface features.

In its preferred form, the netpage system relies on the production of, and human interaction with, netpages. These are pages of text, graphics and images printed on ordinary paper or other media, but which work like interactive web pages. Information is encoded on each page using ink which is substantially invisible to the unaided human eye. The ink, however, and thereby the coded data, can be sensed by an optically imaging pen and transmitted to the netpage system.

In the preferred form, active buttons and hyperlinks on each page can be clicked with the pen to request information from the network or to signal preferences to a network server. In one embodiment, text written by hand on a netpage is automatically recognized and converted to computer text in the netpage system, allowing forms to be
5 filled in. In other embodiments, signatures recorded on a netpage are automatically verified, allowing e-commerce transactions to be securely authorized.

As illustrated in Figure 1, a printed netpage 1 can represent a interactive form which can be filled in by the user both physically, on the printed page, and "electronically", via communication between the pen and the netpage system. The
10 example shows a "Request" form containing name and address fields and a submit button. The netpage consists of graphic data 2 printed using visible ink, and coded data 3 printed as a collection of tags 4 using invisible ink. The corresponding page description 5, stored on the netpage network, describes the individual elements of the netpage. In particular it describes the type and spatial extent (zone) of each interactive element (i.e.
15 text field or button in the example), to allow the netpage system to correctly interpret input via the netpage. The submit button 6, for example, has a zone 7 which corresponds to the spatial extent of the corresponding graphic 8.

As illustrated in Figure 2, the netpage pen 101, a preferred form of which is described in our earlier application USSN 09/_____ (docket no. NPS001US),
20 works in conjunction with a netpage printer 601, an Internet-connected printing appliance for home, office or mobile use. The pen is wireless and communicates securely with the netpage printer via a short-range radio link 9.

The netpage printer 601, preferred forms of which are described in our earlier application USSN 09/_____ (docket no. NPP003US) and our co-filed application
25 USSN 09/_____ (docket no. NPS024US), is able to deliver, periodically or on demand, personalized newspapers, magazines, catalogs, brochures and other publications, all printed at high quality as interactive netpages. Unlike a personal computer, the netpage printer is an appliance which can be, for example, wall-mounted adjacent to an area where the morning news is first consumed, such as in a user's
30 kitchen, near a breakfast table, or near the household's point of departure for the day. It also comes in tabletop, desktop, portable and miniature versions.

Netpages printed at their point of consumption combine the ease-of-use of paper with the timeliness and interactivity of an interactive medium.

As shown in Figure 2, the netpage pen 101 interacts with the coded data on a printed netpage 1 and communicates, via a short-range radio link 9, the interaction to a netpage printer. The printer 601 sends the interaction to the relevant netpage page server 10 for interpretation. In appropriate circumstances, the page server sends a corresponding message to application computer software running on a netpage application server 13. The application server may in turn send a response which is printed on the originating printer.

10 The netpage system is made considerably more convenient in the preferred embodiment by being used in conjunction with high-speed microelectromechanical system (MEMS) based inkjet (Memjet™) printers, for example as described in our earlier application USSN 09/_____ (docket no. IJ52US). In the preferred form of this technology, relatively high-speed and high-quality printing is made more affordable
15 to consumers. In its preferred form, a netpage publication has the physical characteristics of a traditional newsmagazine, such as a set of letter-size glossy pages printed in full color on both sides, bound together for easy navigation and comfortable handling.

The netpage printer exploits the growing availability of broadband Internet access. The netpage printer can also operate with slower connections, but with longer
20 delivery times and lower image quality. The netpage system can also be enabled using existing consumer inkjet and laser printers, although the system will operate more slowly and will therefore be less acceptable from a consumer's point of view. In other embodiments, the netpage system is hosted on a private intranet. In still other embodiments, the netpage system is hosted on a single computer or computer-enabled
25 device, such as a printer.

Netpage publication servers 14 on the netpage network are configured to deliver print-quality publications to netpage printers. Periodical publications are delivered automatically to subscribing netpage printers via pointcasting and multicasting Internet protocols. Personalized publications are filtered and formatted according to
30 individual user profiles.

A netpage printer can be configured to support any number of pens, and a pen

can work with any number of netpage printers. In the preferred implementation, each netpage pen has a unique identifier. A household may have a collection of colored netpage pens, one assigned to each member of the family. This allows each user to maintain a distinct profile with respect to a netpage publication server or application
5 server.

A netpage pen can also be registered with a netpage registration server 11 and linked to one or more payment card accounts. This allows e-commerce payments to be securely authorized using the netpage pen. The netpage registration server compares the signature captured by the netpage pen with a previously registered signature, allowing it
10 to authenticate the user's identity to an e-commerce server. Other biometrics can also be used to verify identity. A version of the netpage pen includes fingerprint scanning, verified in a similar way by the netpage registration server.

Although a netpage printer may deliver periodicals such as the morning newspaper without user intervention, it can be configured never to deliver unsolicited
15 junk mail. In its preferred form, it only delivers periodicals from subscribed or otherwise authorized sources. In this respect, the netpage printer is unlike a fax machine or e-mail account which is visible to any junk mailer who knows the telephone number or e-mail address.

Each object model in the system is described using a Unified Modeling
20 Language (UML) class diagram. A class diagram consists of a set of object classes connected by relationships, and two kinds of relationships are of interest here: associations and generalizations. An association represents some kind of relationship between objects, i.e. between instances of classes. A generalization relates actual classes, and can be understood in the following way: if a class is thought of as the set of all
25 objects of that class, and class A is a generalization of class B, then B is simply a subset of A. Each class is drawn as a rectangle labelled with the name of the class. It contains a list of the attributes of the class, separated from the name by a horizontal line, and a list of the operations of the class, separated from the attribute list by a horizontal line. In the class diagrams which follow, however, operations are never modelled. An association is
30 drawn as a line joining two classes, optionally labelled at either end with the multiplicity of the association. The default multiplicity is one. An asterisk (*) indicates a multiplicity

of "many", i.e. zero or more. Each association is optionally labelled with its name, and is also optionally labelled at either end with the role of the corresponding class. An open diamond indicates an aggregation association ("is-part-of"), and is drawn at the aggregator end of the association line. A generalization relationship ("is-a") is drawn as a
5 solid line joining two classes, with an arrow (in the form of an open triangle) at the generalization end. When a class diagram is broken up into multiple diagrams, any class which is duplicated is shown with a dashed outline in all but the main diagram which defines it. It is shown with attributes only where it is defined.

Netpages are the foundation on which a netpage network is built. They provide
10 a paper-based user interface to published information and interactive services. A netpage consists of a printed page (or other surface region) invisibly tagged with references to an online description of the page. The online page description is maintained persistently by a netpage page server. The page description describes the visible layout and content of the page, including text, graphics and images. It also describes the input elements on the
15 page, including buttons, hyperlinks, and input fields. A netpage allows markings made with a netpage pen on its surface to be simultaneously captured and processed by the netpage system.

Multiple netpages can share the same page description. However, to allow input through otherwise identical pages to be distinguished, each netpage is assigned a
20 unique page identifier. This page ID has sufficient precision to distinguish between a very large number of netpages.

Each reference to the page description is encoded in a printed tag. The tag identifies the unique page on which it appears, and thereby indirectly identifies the page description. The tag also identifies its own position on the page. Characteristics of the
25 tags are described in more detail below.

Tags are printed in infrared-absorptive ink on any substrate which is infrared-reflective, such as ordinary paper. Near-infrared wavelengths are invisible to the human eye but are easily sensed by a solid-state image sensor with an appropriate filter.

A tag is sensed by an area image sensor in the netpage pen, and the tag data is
30 transmitted to the netpage system via the nearest netpage printer. The pen is wireless and communicates with the netpage printer via a short-range radio link. Tags are sufficiently

small and densely arranged that the pen can reliably image at least one tag even on a single click on the page. It is important that the pen recognize the page ID and position on every interaction with the page, since the interaction is stateless. Tags are error-correctably encoded to make them partially tolerant to surface damage.

- 5 The netpage page server maintains a unique page instance for each printed netpage, allowing it to maintain a distinct set of user-supplied values for input fields in the page description for each printed netpage.

10 The relationship between the page description, the page instance, and the printed netpage is shown in Figure 3. The printed netpage may be part of a printed netpage document 45. The page instance is associated with both the netpage printer which printed it and, if known, the netpage user who requested it.

15 In a preferred form, each tag identifies the region in which it appears, and the location of that tag within the region. A tag may also contain flags which relate to the region as a whole or to the tag. One or more flag bits may, for example, signal a tag sensing device to provide feedback indicative of a function associated with the immediate area of the tag, without the sensing device having to refer to a description of the region. A netpage pen may, for example, illuminate an "active area" LED when in the zone of a hyperlink.

20 In a preferred embodiment, each tag contains an easily recognized invariant structure which aids initial detection, and which assists in minimizing the effect of any warp induced by the surface or by the sensing process. The tags preferably tile the entire page, and are sufficiently small and densely arranged that the pen can reliably image at least one tag even on a single click on the page. It is important that the pen recognize the page ID and position on every interaction with the page, since the interaction is stateless.

25 In a preferred embodiment, the region to which a tag refers coincides with an entire page, and the region ID encoded in the tag is therefore synonymous with the page ID of the page on which the tag appears. In other embodiments, the region to which a tag refers can be an arbitrary subregion of a page or other surface. For example, it can coincide with the zone of an interactive element, in which case the region ID can directly
30 identify the interactive element.

Each tag contains typically contains 16 bits of tag ID, at least 90 bits of region ID, and a number of flag bits. Assuming a maximum tag density of 64 per square inch, a 16-bit tag ID supports a region size of up to 1024 square inches. Larger regions can be mapped continuously without increasing the tag ID precision simply by using abutting regions and maps. The distinction between a region ID and a tag ID is mostly one of convenience. For most purposes the concatenation of the two can be considered as a globally unique tag ID. Conversely, it may also be convenient to introduce structure into the tag ID, for example to define the x and y coordinates of the tag. A 90-bit region ID allows 2^{90} ($\sim 10^{27}$ or a thousand trillion trillion) different regions to be uniquely identified. Tags may also contain type information, and a region may be tagged with a mixture of tag types. For example, a region may be tagged with one set of tags encoding x coordinates and another set, interleaved with the first, encoding y coordinates.

In one embodiment, 120 bits of tag data are redundantly encoded using a (15, 5) Reed-Solomon code. This yields 360 encoded bits consisting of 6 codewords of 15 4-bit symbols each. The (15, 5) code allows up to 5 symbol errors to be corrected per codeword, i.e. it is tolerant of a symbol error rate of up to 33% per codeword. Each 4-bit symbol is represented in a spatially coherent way in the tag, and the symbols of the six codewords are interleaved spatially within the tag. This ensures that a burst error (an error affecting multiple spatially adjacent bits) damages a minimum number of symbols overall and a minimum number of symbols in any one codeword, thus maximising the likelihood that the burst error can be fully corrected.

Any suitable error-correcting code can be used in place of a (15, 5) Reed-Solomon code, for example a Reed-Solomon code with more or less redundancy, with the same or different symbol and codeword sizes; another block code; or a different kind of code, such as a convolutional code (see, for example, Stephen B. Wicker, Error Control Systems for Digital Communication and Storage, Prentice-Hall 1995, the contents of which are herein incorporated by cross-reference).

One embodiment of the physical representation of the tag, shown in Figure 4a and described in our earlier application USSN 09/_____ (docket no. NPT002US), includes fixed target structures 15, 16, 17 and variable data areas 18. The fixed target structures allow a sensing device such as the netpage pen to detect the tag and infer its

three-dimensional orientation relative to the sensor. The data areas contain representations of the individual bits of the encoded tag data. To maximise its size, each data bit is represented by a radial wedge in the form of an area bounded by two radial lines and two concentric circular arcs. Each wedge has a minimum dimension of 8 dots at 1600 dpi and is designed so that its base (its inner arc), is at least equal to this minimum dimension. The height of the wedge in the radial direction is always equal to the minimum dimension. Each 4-bit data symbol is represented by an array of 2x2 wedges. The fifteen 4-bit data symbols of each of the six codewords are allocated to the four concentric symbol rings 18a to 18d in interleaved fashion. Symbols are allocated alternately in circular progression around the tag. The interleaving is designed to maximise the average spatial distance between any two symbols of the same codeword.

In order to support "single-click" interaction with a tagged region via a sensing device, the sensing device must be able to see at least one entire tag in its field of view no matter where in the region or at what orientation it is positioned. The required diameter of the field of view of the sensing device is therefore a function of the size and spacing of the tags. Assuming a circular tag shape, the minimum diameter of the sensor field of view 193 is obtained when the tags are tiled on a equilateral triangular grid, as shown in Figure 4b.

The tag structure just described is designed to allow both regular tilings of planar surfaces and irregular tilings of non-planar surfaces. Regular tilings are not, in general, possible on non-planar surfaces. In the more usual case of planar surfaces where regular tilings of tags are possible, i.e. surfaces such as sheets of paper and the like, more efficient tag structures can be used which exploit the regular nature of the tiling.

An alternative tag structure more suited to a regular tiling is shown in Figure 5a. The tag 4 is square and has four perspective targets 17. It is similar in structure to tags described by Bennett et al. in US Patent 5,051,746. The tag represents sixty 4-bit Reed-Solomon symbols 47, for a total of 240 bits. The tag represents each one bit as a dot 48, and each zero bit by the absence of the corresponding dot. The perspective targets are designed to be shared between adjacent tags, as shown in Figures 5b and 5c. Figure 5b shows a square tiling of 16 tags and the corresponding minimum field of view 193, which must span the diagonals of two tags. Figure 5c shows a square tiling of nine tags,

containing all one bits for illustration purposes.

Using a (15, 7) Reed-Solomon code, 112 bits of tag data are redundantly encoded to produce 240 encoded bits. The four codewords are interleaved spatially within the tag to maximize resilience to burst errors. Assuming a 16-bit tag ID as before, this allows a region ID of up to 92 bits. The data-bearing dots 48 of the tag are designed to not overlap their neighbors, so that groups of tags cannot produce structures which resemble targets. This also saves ink. The perspective targets therefore allow detection of the tag, so further targets are not required.

Although the tag may contain an orientation feature to allow disambiguation of the four possible orientations of the tag relative to the sensor, it is also possible to embed orientation data in the tag data. For example, the four codewords can be arranged so that each tag orientation contains one codeword placed at that orientation, as shown in Figure 5d, where each symbol is labelled with the number of its codeword (1-4) and the position of the symbol within the codeword (A-O). Tag decoding then consists of decoding one codeword at each orientation. Each codeword can either contain a single bit indicating whether it is the first codeword, or two bits indicating which codeword it is. The latter approach has the advantage that if, say, the data content of only one codeword is required, then at most two codewords need to be decoded to obtain the desired data. This may be the case if the region ID is not expected to change within a stroke and is thus only decoded at the start of a stroke. Within a stroke only the codeword containing the tag ID is then desired. Furthermore, since the rotation of the sensing device changes slowly and predictably within a stroke, only one codeword typically needs to be decoded per frame.

It is possible to dispense with perspective targets altogether and instead rely on the data representation being self-registering. In this case each bit value (or multi-bit value) is typically represented by an explicit glyph, i.e. no bit value is represented by the absence of a glyph. This ensures that the data grid is well-populated, and thus allows the grid to be reliably identified and its perspective distortion detected and subsequently corrected during data sampling. To allow tag boundaries to be detected, each tag data must contain a marker pattern, and these must be redundantly encoded to allow reliable detection. The overhead of such marker patterns is similar to the overhead of explicit

perspective targets. One such scheme uses dots positioned at various points relative to grid vertices to represent different glyphs and hence different multi-bit values (see Anoto Technology Description, Anoto April 2000).

Decoding a tag results in a region ID, a tag ID, and a tag-relative pen transform.

- 5 Before the tag ID and the tag-relative pen location can be translated into an absolute location within the tagged region, the location of the tag within the region must be known. This is given by a tag map, a function which maps each tag ID in a tagged region to a corresponding location. A tag map reflects the scheme used to tile the surface region with tags, and this can vary according to surface type. When multiple tagged regions
- 10 share the same tiling scheme and the same tag numbering scheme, they can also share the same tag map. The tag map for a region must be retrievable via the region ID. Thus, given a region ID, a tag ID and a pen transform, the tag map can be retrieved, the tag ID can be translated into an absolute tag location within the region, and the tag-relative pen location can be added to the tag location to yield an absolute pen location within the
- 15 region.

- The tag ID may have a structure which assists translation through the tag map. It may, for example, encoded cartesian coordinates or polar coordinates, depending on the surface type on which it appears. The tag ID structure is dictated by and known to the tag map, and tag IDs associated with different tag maps may therefore have different
- 20 structures.

Two distinct surface coding schemes are of interest, both of which use the tag structure described earlier in this section. The preferred coding scheme uses “location-indicating” tags as already discussed. An alternative coding scheme uses “object-indicating” (or “function-indicating”) tags.

- 25 A location-indicating tag contains a tag ID which, when translated through the tag map associated with the tagged region, yields a unique tag location within the region. The tag-relative location of the pen is added to this tag location to yield the location of the pen within the region. This in turn is used to determine the location of the pen relative to a user interface element in the page description associated with the region.
- 30 Not only is the user interface element itself identified, but a location relative to the user interface element is identified. Location-indicating tags therefore trivially support the

capture of an absolute pen path in the zone of a particular user interface element.

5 An object-indicating (or function-indicating) tag contains a tag ID which directly identifies a user interface element in the page description associated with the region (or equivalently, a function). All the tags in the zone of the user interface element identify the user interface element, making them all identical and therefore indistinguishable. Object-indicating tags do not, therefore, support the capture of an absolute pen path. They do, however, support the capture of a relative pen path. So long as the position sampling frequency exceeds twice the encountered tag frequency, the displacement from one sampled pen position to the next within a stroke can be unambiguously determined. As an alternative, the netpage pen 101 can contain a pair or motion-sensing accelerometers, as described in our earlier application USSN 09/_____ (docket no. NPS001US).

15 With either tagging scheme, the tags function in cooperation with associated visual elements on the netpage as user interactive elements in that a user can interact with the printed page using an appropriate sensing device in order for tag data to be read by the sensing device and for an appropriate response to be generated in the netpage system.

20 Each application user interface flow is illustrated as a collection of documents linked by command arrows. A command arrow indicates that the target document is printed as a result of the user pressing the corresponding command button on the source page. Some command arrows are labelled with multiple commands separated by slashes ('/'), indicating that any one of the specified commands causes the target document to be printed. Although multiple commands may label the same command arrow, they typically have different side-effects.

25 In application terms, it is important to distinguish between netpage documents and netpage forms. Documents contain printed information, as well as command buttons which can be pressed by the user to request further information or some other action. Forms, in addition to behaving like normal documents, also contain input fields which can be filled in by the user. They provide the system with a data input mechanism. It is also useful to distinguish between documents which contain generic information and documents which contain information specific to a particular interaction between the

user and an application. Generic documents may be pre-printed publications such as magazines sold at news stands or advertising posters encountered in public places. Forms may also be pre-printed, including, for example, subscription forms encountered in pre-printed publications. They may, of course, also be generated on-the-fly by a netpage printer in response to user requests. User-specific documents and forms are normally generated on the fly by a netpage printer in response to user requests. Figure 6 shows a generic document 990, a generic form 991, a user-specific document 992, and a user-specific form 993.

Netpages which participate in a user interface flow are further described by abstract page layouts. A page layout may contain various kinds of elements, each of which has a unique style to differentiate it from the others. As shown in Figure 7, these include fixed information 994, variable information 995, input fields 996, command buttons 997, draggable commands 998, and text hyperlinks or hypertext links 999.

When a user interface flow is broken up into multiple diagrams, any document which is duplicated is shown with dashed outlines in all but the main diagram which defines it.

8. Device Controls using the Netpage™ System

The netpage system, then provides the facility to control electrical or electronic devices. If a particular device can be remotely controlled, either via a network interface or an infrared interface, then it is possible to completely separate the user interface to the device from the device itself. Furthermore, the user interface can then be implemented as a netpage, sensed by a netpage sensing device carried by the user. The netpage sensing device should ideally be small, unobtrusive and portable. The netpage pen provides one possible form factor. Alternatively, the netpage sensing device might be embedded in a ring, hand glove or finger glove worn by the user. It could also be embedded in custom eyewear, with interaction controlled by gaze.

The netpage identifies the device, and is printed with the user interface of the device in the form of buttons etc. Being passive, the surface gives no feedback to the user as to the status of the device or its user interface. Feedback can, however, be

provided via the sensing device if necessary. The netpage base station (e.g. the netpage Printer) resolves operations on the netpage with reference to a user interface structure previously selected by the user from the device itself or its manufacturer, or designed by the user using elements provided by the device or its manufacturer.

5

The following illustrates the concepts of a netpage device control in detail by way of a netpage device control application for audio and video equipment. Although specific reference is made to a netpage pen, any netpage sensing device can be used. Similarly, although specific reference is made to a netpage printer, any netpage base station can be used, i.e. any device which receives input from a netpage sensing device and either interprets the input directly or forwards the input to one or more network servers for interpretation.

10

DEVICE CONTROL

The netpage system provides a mechanism for controlling devices such as television receivers, VCRs and video-on-demand units.

15

A netpage can contain printed control buttons in the style of a remote control unit, or printed playback control buttons associated with individual programs or movies. Playback controls can include play, pause, stop, start and end. An iconic image of the program or movie can itself act as a play button.

20

Consumer disk-based video recorders are now available which support simultaneous recording and playback. They allow buffered viewing of broadcast video and provide some of the advantages of video-on-demand. A daily newspaper delivered via the netpage system can contain links to broadcast news video captured in this way some time before delivery of the newspaper, perhaps under control of the netpage printer.

25

With broadcast television, a printed netpage program listing can provide a useful interface to a collection of television channels, particularly if one or more channels are being buffered by a disk-based video recorder. With true video-on-demand, a printed netpage catalog can provide a useful interface to a video library.

30

The netpage pen can be augmented to work as an infrared remote control.

Commands generated by pen interactions with printed video playback controls can also be sent directly from the netpage printer to the video device, by wired or wireless control interface, including infrared and radio (e.g. Bluetooth).

In the netpage system device control services are provided by one or more
5 device control applications running on servers distributed on the network. User interactions with device control netpages are routed to the appropriate device control application via the appropriate page server using normal netpage mechanisms.

Various device control interaction scenarios are illustrated in Figure 8. When a user invokes a device function on a device control netpage 500, the input is sent from the
10 user's netpage pen 101 to the user's netpage printer 802, in the usual way (A). The input is relayed to the application 503 in the usual way (B). On receipt of the input, the application identifies the designated device 600 and determines the specified device command. If the designated device 600 is directly accessible to an application, then the application may send the command code directly to the device (C1). This may be the
15 case if the device is connected to a network accessible to the application 503, e.g. a wired or wireless wide-area network. Otherwise the application may send the command code to the originating printer 802 (C2). The printer 802 may be modified to be receptive to device control commands sent to it by a device control application. If the designated device 600 is directly accessible to the printer 802, then the printer may send the
20 command code directly to the device (D1). This may be the case if the device is connected to a network accessible to the printer, e.g. a wired or wireless wide-area or local-area network, or if the printer and device can communicate directly by wire or wirelessly. Otherwise the printer 502 may send the command code to the originating pen 101 (D2). The pen 101 may be modified to be receptive to device control commands sent
25 to it by a printer 502. The pen may be augmented with an infrared transmitter, allowing it to transmit the command code to the device (E1). This requires the pen's infrared transmitter to be in line of sight of the device's infrared receiver. As an alternative to sending the command code to the pen 101, the printer 502 may instead send the command code to a remote control "pod" 504 (D3). This is a device which is installed
30 within line of sight of the device 600. It can communicate with the printer by wire or wirelessly, and incorporates an infrared transmitter, allowing it to transmit the command code to the device 600 (E2). Because the pod 504 may be placed in a location which

gives it a guaranteed view of a number of devices, it provides a useful alternative to augmenting the pen 101.

DEVICE CONTROL OBJECT MODEL

The Device Control object model revolves around devices and device setups
5 maintained for particular netpage users in relation to particular netpage printers. The Device Control class diagram is shown in Figure 9.

Each netpage user 800 has one or more device setups 511. A user may have a separate device setup 511 for each netpage printer 802 they have access to. For example, a user 800 may have one device setup 511 at home and another at their office. Each
10 device setup 511 has a name 512 assigned by the user. Each device setup 511 may have one or more users, but each user 800 only has access to one device setup 511 per printer 802.

A device setup 511 has a number of user devices 513 associated with it, one for each device 600 the user can control. Each user device 513 has an alias name 514
15 assigned by the user, and has associated with it the manufacturer's device model information.

Each device 513 can have a number of remote controls 515. A remote control can be used by any user 800 authorized for the device setup 511. A remote control 515 has a number of remote control functions 510 associated with it, each with a function
20 identifier 517. The function identifier 517 is used to look up the control code 565 for the function from the manufacturer 568. A remote control 515 may be device specific 518, universal 519 (i.e. control more than one device), or generic 520. The Remote Control class diagram is shown in Figure 13.

A device-specific remote control 518 only operates the user device for which it
25 was printed.

A universal remote control (URC) 519 may operate several devices within the device setup 511. The user selects a device 513 on the URC 519 to change the URC mode and thereby to choose which device is current. The URC 519 typically only operates one device in each mode.

30 A generic remote control 520 can operate any device 569 for any user. A

generic remote control 520 may be printed in a netpage publication such as a television program. A generic remote control 520 operates the default devices 521 in the device setup 511. If, for example, a household has more than one television the remote control 520 will only operate the default television. For each device type, if no default device 521 has been specified by the user then the first device of the relevant type added by the user is automatically made the default. A default video receiver 522 may be specified for a specific broadcast channel 523. This can be useful where one channel can be received on several of the user's devices 513. The Default Device class diagram is shown in Figure 10.

When adding a device 569 to their device setup 511 the user 800 must specify the manufacturer 568, device type and model of the device 524.

Each manufacturer 568 has a number of devices 569 and each device 569 has a number of models 524. Each device model 524 has associated with it a remote control interface 525, and information about the device's channel, date, time and length of program (CDTL) programming capability 526. The remote control interface 525 contains information about the remote control functions 516 available for the device 569. Each remote control interface (RCI) function 516 has a function identifier 527 and the control code 565 to perform the function. The CDTL capability 526 specifies the information that can be programmed for the device. For example, a VCR can be programmed with CDTL information, whereas a cable television receiver may only be able to be programmed with channel, date and time (CDT) information. The Device Information class diagram is shown in Figure 11.

Each device setup 511 may have associated with it a number of program requests 568. A program request 568 is created when a user 800 requests a video broadcast program to be recorded. A published television program schedule 528 contains a number of entries 529, one for each television program to be broadcast. Associated with each entry is one or more CDTL information 530 records containing the channel, date, time and program length information for the broadcast. This information can then be used to control the user devices 513 for unattended recording of broadcast television programs. The Program Schedule class diagram is shown in Figure 15.

The Device Channel class diagram is illustrated in Figure 13. Each device 569

may have associated with it channel locality information 531, describing the broadcast channels available within a given locality. These may be divided into channel categories 532, e.g. free-to-air, cable, etc.

5 The user may receive a given broadcast channel 533 through several of their devices, for example free-to-air broadcasts may be available through the television, VCR, and cable box. Optionally, the user has the ability to define a default video receiver device for each channel 533. If the user elects, via a program schedule, to record a program on a channel which is available through several of the user's devices, then the default video receiver, as specified in the user's device setup 511, is used.

10 **DEVICE CONTROL USER INTERFACE**

The user 800 typically obtains the netpage Device Setup main page 534 from the Device Control application's entry in the netpage system application catalog, obtained via the netpage printer's help page. The user may also bookmark the page and subsequently obtain it via their favorites list, or obtain it via their history list.

15 The Device Control user interface flow is shown in Figure 16.

Device Setup Main Page

The Device Setup main page 534, shown in Figure 21, lists the device setups for the current netpage printer 802, and the users registered for each setup. If the privileges setting on the printer is not enabled then all device setups for the printer are
20 listed. If the privileges setting is enabled then only those device setups that the user is authorized to see are listed. If the user is a system administrator then all device setups are listed.

To print the details for a particular device setup the user presses the <Details> button 535 next to the desired setup. To create a new device setup, the user enters a setup
25 name 536 and presses the <New Device Setup> button 537. Both actions print a Device Setup Details page 538.

The user can press <List My Devices> 539 to print a Device List page 540 for the user's own device setup. The Device Setup user interface flow is shown in Figure 16.

The Device Setup Details page 538, shown in Figure 22, lists all the registered

users and devices for a device setup. If the device setup is new, then no registered users or devices are listed.

The user can print the full details of a registered user or device by pressing the <Details> 541 button next to the desired entry. For a user entry a User Details page 542 is printed. For a device entry a Device Details page 543 is printed showing the device manufacturer, device type, model, device alias, and the default devices to which this device is assigned.

The user can remove a user or device from the device setup 511 by pressing the <Remove> button 544 next to the appropriate entry. The Device Setup Details page 538 is reprinted with the appropriate entry removed.

The user can add a new user to the device setup by pressing the <Add New User> button 545. An Add New User form 546 is printed listing all users registered on the current printer but not included in any device setup. A user can only be included in one device setup per netpage printer.

The user can add a new device to the device setup by pressing the <Add New Device> button 547. A Select Manufacturer page 548 is printed.

The Setup Details user interface flow is shown in Figure 17.

Adding a New Device

A new device 513 can be added to a device setup 511 by pressing the <Add New Device> button 547 on the Device Setup Details page 538. A Select Manufacturer page 548 is printed, as shown in Figure 27. The user selects the device manufacturer 549 from the list by clicking the name of manufacturer. A Select Device Type page 550 is printed, as shown in Figure 28.

The user selects the appropriate device type 551 from the list by clicking on the device type name. A Select Model page 552 is printed, as shown in Figure 29.

The user selects the appropriate device model 553 from the list by clicking on the model name. The Set Device Defaults form 554 is printed, as shown in Figure 30.

On the Set Device Defaults form 554 the user specifies an alias name for the device. The user then assigns this device as the default for one or more device types by

checking the appropriate check boxes. For example, the user's VCR may be assigned as the default television tuner and default video recorder in their device setup. When the form is complete the user presses <Add Device> 555. The Device Setup Details page 538 is printed, showing the new device in the device list.

- 5 The Add Device user interface flow is shown in Figure 19.

User's Device List

The user typically obtains the User's Device List 540 from the Device Setup main page 534 (<List My Devices> button 539). The user may also bookmark the page and subsequently obtain it via their favorites list, or obtain it via their history list.

- 10 The Device List user interface flow is shown in Figure 18.

- The Device List 540 is shown in Figure 23 and indicates which devices are assigned as defaults for the setup. To print a Remote Control page 570 for a specific device the user clicks on the device name. An example of a device-specific television remote control 570 is shown in Figure 25. A device-specific remote control 570 will only
15 operate the device named at the top of the remote control. A device-specific remote control for a particular television will only operate that one television, and will not operate any other television.

- The user can press the <Create URC> button 556 to print a Create Universal Remote Control form 557, as shown in Figure 24. This form lists all the devices in the
20 current device setup. The user selects the devices to include on the URC by checking the appropriate device check boxes, and then clicking the <Print URC> button 558. The Universal Remote Control page 571 is printed. An example of a URC page 571 is shown in Figure 26.

- The user can press the <Device Setup> button 559 on the Device List Page 540
25 to print their Device Setup Details page 538.

The user can press the <Modify Defaults> button 560 to print a Modify Defaults form 561. This form allows the user to change the assignment of default devices.

- The user can press the <List Requests> button 562 to print a Request List
30 page 563. This lists all the video broadcasts scheduled to be recorded for the user's

device setup.

Remote Controls

There are three types of remote control. These are the device-specific remote control, the universal remote control, and the generic remote control. Device specific and
5 universal remote controls are printed by the user. Generic remote controls are printed in netpage publications such as television program schedules.

The appearance and functions of a remote control will depend on the device type, manufacturer etc. A manufacturer may provide their own netpage remote control which can be printed by the user on demand.

10 When the user presses a remote control button on a generic remote control the device control application looks up the appropriate default device in the user's device setup. This determines the user device and therefore the device model.

A universal remote control 571 is illustrated in Figure 26. The device being controlled by a universal remote control is determined by its mode (set when a device
15 alias name button 564 is pressed on the control). A device-specific remote control 570 as shown in Figure 25 is associated with a single user device. Thus when the user presses a remote control button 565 on a device-specific or universal remote control the device alias name, and therefore the device model, of the device being controlled is known.

A remote control button 565 is associated with a remote control function 510,
20 with a unique function identifier 517 (unique within the device model). The device model is referenced in the manufacturer's database to look up the RCI (Remote Control Interface) function 516 control code 565 for the required function identifier. This command code is then transmitted to the user device.

The method of the transmission may vary depending on the device's capability
25 and the user's pen.

Scheduled Broadcast Recording

A netpage published television program schedule 572 contains a calendar of television broadcasts giving a description 566 of each program, and channel, date, and time information about the program. Each program listing may have associated with it

one or more buttons 567, as shown in Figure 31.

The <Record> button 567 can be used to program the user's default video recording device to record the requested broadcast. The request 568 is stored in the user's program request list 573 (associated with their device setup). The Record Program
5 user interface flow is shown in Figure 20.

As a more advanced service, a program information provider can send updated program information to the user's printer, or can add program requests to the user's program request list 573 on a regular basis for a user's favorite programs. It can also automatically modify existing requests if program information changes.

10 News Clips

A published news story can have an associated video clip and printed playback control buttons.

A set of news clips can be broadcast some time before the newspaper is delivered to the netpage printer 802. The printer 802 can be instructed by the publisher to
15 listen to the broadcast and record the broadcast on the user's disk-based video recording system. Clip indexing information is transmitted with the video clips, for example in the closed caption part of the broadcast.

The buttons printed with the news story control playback of the broadcast video clip from the user's default disk-based video recorder to the user's default video monitor.
20 Control buttons may include play, stop, slow motion, and freeze frame.

Another type of video clip is the video-on-demand (VOD) video clip. A VOD video clip is broadcast to the user on demand, from a third party VOD supplier.

Parental Control

The Netpage device control system can also be used to give parental
25 control over rated content. The system administrator can set the allowable content rating for particular users. A user without the required authority cannot operate a remote control to view rated channels or broadcasts.

CONCLUSION

The present invention has been described with reference to a preferred

embodiment and number of specific alternative embodiments. However, it will be appreciated by those skilled in the relevant fields that a number of other embodiments, differing from those specifically described, will also fall within the spirit and scope of the present invention. Accordingly, it will be understood that the invention is not
5 intended to be limited to the specific embodiments described in the present specification, including documents incorporated by cross-reference as appropriate. The scope of the invention is only limited by the attached claims.

CLAIMS

1. A method of enabling a device to be controlled in which the device is operative to perform at least one function in response to control instructions from a computer system, the method including the steps of

providing a control interface containing information relating to the device function, the control interface including coded data indicative of an identity of the control interface and of at least one reference point of the control interface;

- receiving, in the computer system, indicating data from a sensing device regarding the identity of the control interface and a position of the sensing device relative to the control interface, the sensing device, when placed in an operative position relative to the control interface, sensing the indicating data using at least some of the coded data; and

- effecting, in the computer system and from the indicating data, an operation relating to at least one parameter of the control instructions.

2. The method of claim 1 in which said at least one parameter relating to the control instructions is associated with at least one zone of the control interface and in which the method includes effecting, in the computer system and from the zone relative to which the sensing device is located, an operation relating to said at least one parameter.

3. The method of claim 2 which includes receiving, in the computer system, data regarding movement of the sensing device relative to the control interface, the sensing device sensing its movement relative to the control interface using at least some of the coded data; and

effecting, in the computer system and from said movement being at least partially within said at least one zone, an operation relating to said at least one parameter of the control instructions.

4. A method of enabling a device to be controlled in which the device is operative to perform at least one function in response to control instructions from a computer system, the method including the steps of

5 providing a control interface containing information relating to the device function, the control interface including coded data indicative of at least one parameter of the control instructions;

receiving, in the computer system, data from a sensing device relating to said at least one parameter and regarding movement of the sensing device relative to the control
10 interface, the sensing device, when moved relative to the control interface, sensing the data regarding said at least one parameter using at least some of the coded data and generating the data regarding its own movement relative to the control interface; and

interpreting, in the computer system, said movement of the sensing device as it relates to said at least one parameter.

15

5. A method of enabling a device to be controlled in which the device is operative to perform at least one function in response to control instructions from a computer system, the method including the steps of

providing a user with a control interface including coded data indicative of an
20 identity of the control interface;

receiving, in the computer system, data from a sensing device regarding an identity of the user and regarding the identity of the control interface, the sensing device containing the data regarding the identity of the user and sensing the data regarding the identity of the control interface using at least some of the coded data; and

25 effecting, in the computer system and from the data regarding the identity of the user and the identity of the control instructions, an operation relating to at least one parameter of the control instructions.

6. The method of claim 6 which includes receiving, in the computer system, data

from the sensing device regarding movement of the sensing device relative to the control interface, the sensing device generating data regarding its own movement relative to the control interface.

5 7. The method of any one of claims 1, 4 or 5 in which the parameter of the control instructions is selected from the group comprising:

- selecting said device;
- selecting said function to be performed;
- establishing default setting for said function;
- 10 · establishing default setting for said device;
- registering user access to control the device function;
- authorising user access to control the device function; and
- issuing a command code to said device to perform said function.

15 8. The method according to any one of claims 1, 4 or 5 further including the step of issuing a command code to said device to perform said function in response to operation of the computer system.

9. The method of claim 8 in which the command code is issued to said device
20 through said sensing device.

10. The method of claim 8 in which the command code is issued to said device independently of said sensing device.

25 11. The method according to claim 8 in which the command code is issued to said device using wireless technology.

12. The method of any one of claims 1, 4 or 5 which includes printing the control interface on demand.

13. The method of claim 12 which includes printing the control interface on a surface of a surface-defining means and, at the same time that the control interface is printed, printing the coded data on the surface.

14. The method of claim 13 which includes printing the coded data to be substantially invisible in the visible spectrum.

10

15. The method of claim 1, 4, or 5 which includes retaining a retrievable record of each control interface generated, the control interface being retrievable using its identity as contained in its coded data.

15 16. The method of any one of claims 1, 4 or 5 which includes distributing a plurality of the control interfaces using a mixture of multicast and pointcast communications protocols.

17. The method of claim 1 or 4 in which the sensing device contains an identification means which imparts a unique identity to the sensing device and identifies it as belonging to a particular user and in which the method includes monitoring, in the computer system, said identity.

18. The method of any one of claims 1, 4 or 5 which includes providing all required information relating to the device function in the control interface to eliminate the need for a separate display device.

19. The method of any one of claims 1, 4 or 5 in which the control interface is

printed on multiple pages and in which the method includes binding the pages.

20. A system for enabling at least one function of a device to be controlled, the system including

5 a control interface containing information relating to the device function, the control interface including coded data indicative of an identity of the control interface and of at least one reference point of the control interface; and

a computer system incorporating control instructions operative to cause said device to perform said function and operative to receive indicating data from a sensing
10 device for effecting an operation relating to at least one parameter of the control instructions, the indicating data being indicative of the identity of the control interface and a position of the sensing device relative to the control interface, the sensing device sensing the indicating data using at least some of the coded data.

15 21. The system of claim 29 in which said at least one parameter relating to the control instructions is associated with at least one zone of the control interface.

22. The system of claim 29 which includes the sensing device, the sensing device sensing its movement relative to the control interface using at least some of the coded
20 data.

23. A system for enabling at least one function of a device to be controlled in response to control instructions, the system including

a control interface containing information relating to the device function, the
25 control interface including coded data indicative of at least one parameter of the control instructions; and

a computer system incorporating said control instructions, and operative to receive data from a sensing device regarding said at least one parameter and regarding movement of the sensing device relative to the control interface, and for interpreting said

movement of the sensing device as it relates to said at least one parameter, the sensing device, when moved relative to the control interface, sensing the data regarding said at least one parameter using at least some of the coded data and generating the data regarding its own movement relative to the control interface.

5

24. A system for enabling at least one function of a device to be controlled, the system including

a control interface including coded data indicative of an identity of the control interface; and

10 a computer system incorporating control instructions to cause said device to perform said function, and operative to receive from a sensing device data regarding an identity of the user and the identity of the control interface, and for effecting, from said received data, an operation relating to a parameter of said control instructions, the sensing device containing the data regarding the identity of the user and sensing the data
15 regarding the identity of the control interface using at least some of the coded data.

25. The system of claim 24 which includes the sensing device, the sensing device sensing its movement relative to the control interface.

20 26. The system of any one of claims 20, 23 or 24 in which the parameter of the control instructions is selected from the group comprising

- selecting said device;
- selecting said function to be performed;
- establishing default setting for said function;
- 25 · establishing default setting for said device;
- registering user access to control the device function;
- authorising user access to control the device function; and
- issuing a command code to said device to perform said function.

27. A system according to any one of claims 20, 23, or 24 in which the computer is operative to issue a command code to said device to perform said function through said sensing device.

5

28. A system according to any one of claims 20, 23, or 24 in which the computer is operative to issue a command code to said device to perform said function independently of said sensing device.

10

29. The system of claim 20 or 23 in which the sensing device contains an identification means which imparts a unique identity to the sensing device and identifies it as belonging to a particular user.

15

30. The system of any one of claims 20, 23, or 24 in which the control interface is printed on a surface of a surface-defining means and in which the system includes a printer for printing the control interface on demand.

31. The system of claim 30 in which the printer prints the coded data at the same time as printing the control interface on the surface-defining means.

20

32. The system of any one of claims 20, 23, or 24 in which the coded data is substantially invisible in the visible spectrum.

25

33. The system of claim 20 or 23 which includes a database for keeping a retrievable record of each control interface generated, each control interface being retrievable by using its identity as included in its coded data.

34. The system of claim 30 in which, to cater for a control interface printed on

[illegible]

ABSTRACT

The invention concerns device control for enabling electrical or electronic devices to be controlled through computer systems. Employing the invention involves
5 the use of one or more control interfaces which are capable of interacting with a computer system or network, each interface comprising sheet material such as paper which has coded data printed on it and which allows it to interact with the computer system by use of a sensing device operated by a user. Through this interaction, data can
10 be forwarded to the computer system from the control interface to effect in that system an operation relating to the functioning of the device.

(Figure 8)

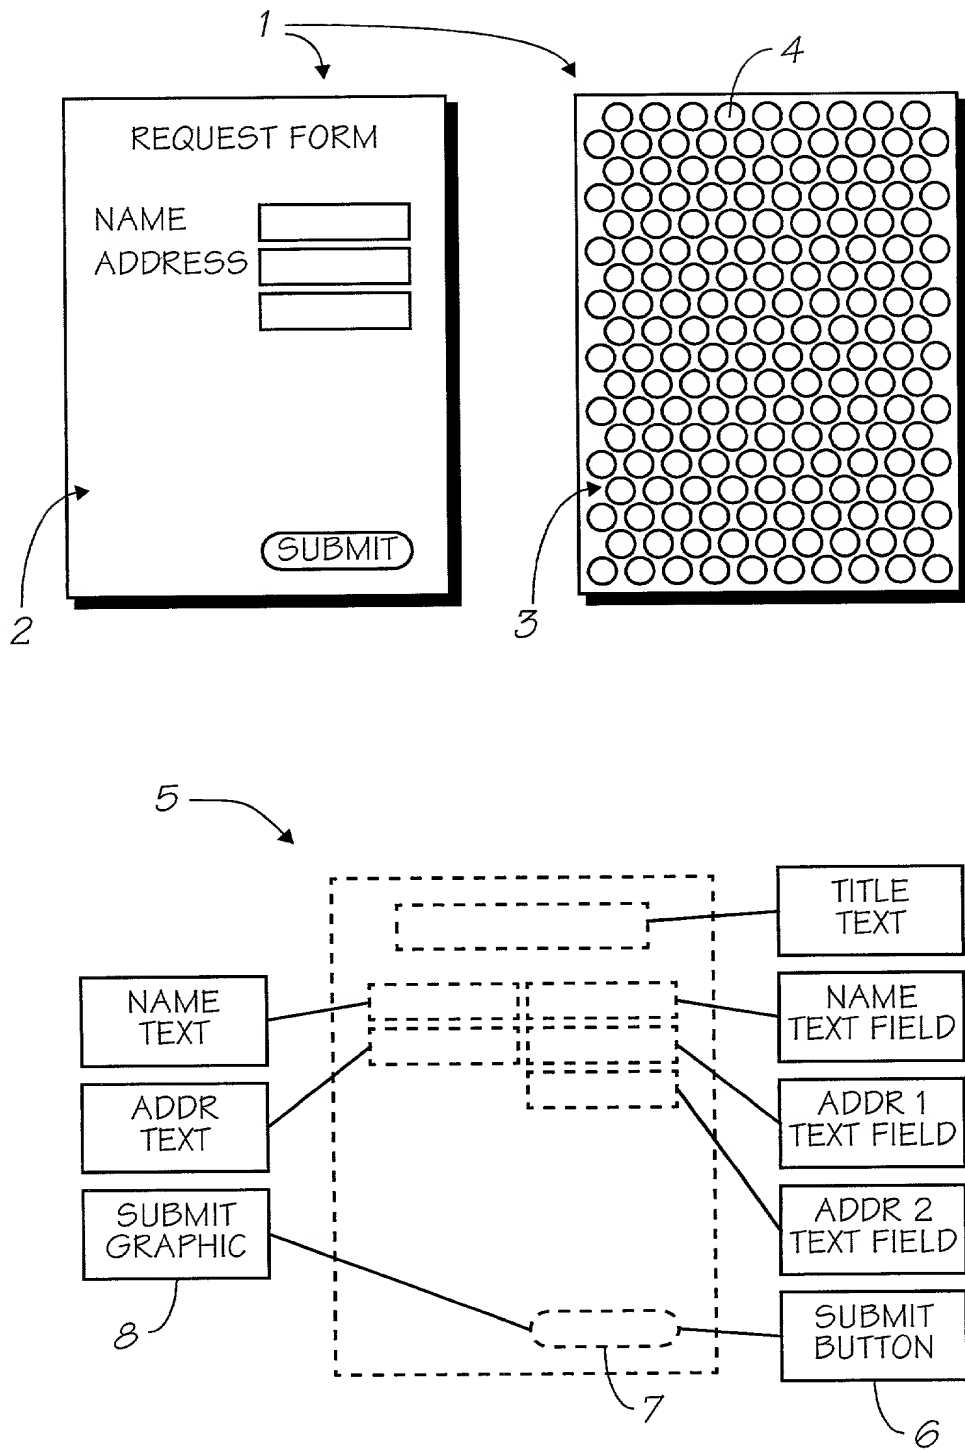


FIG. 1

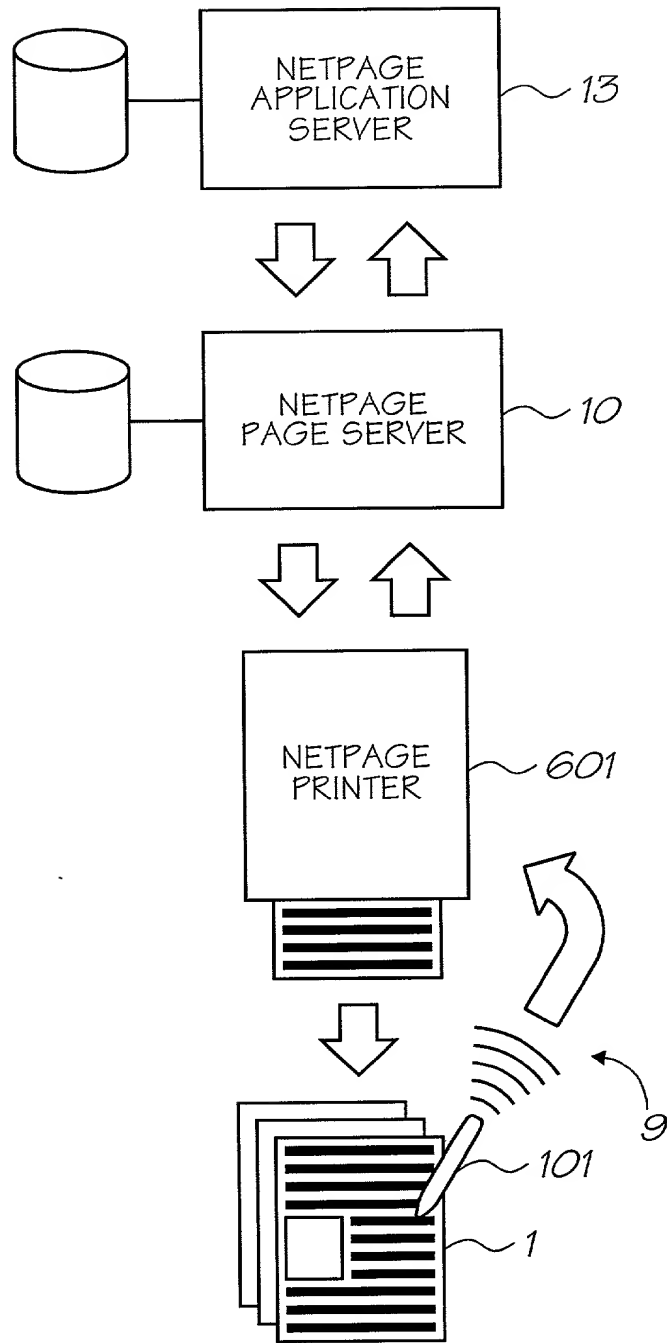


FIG. 2

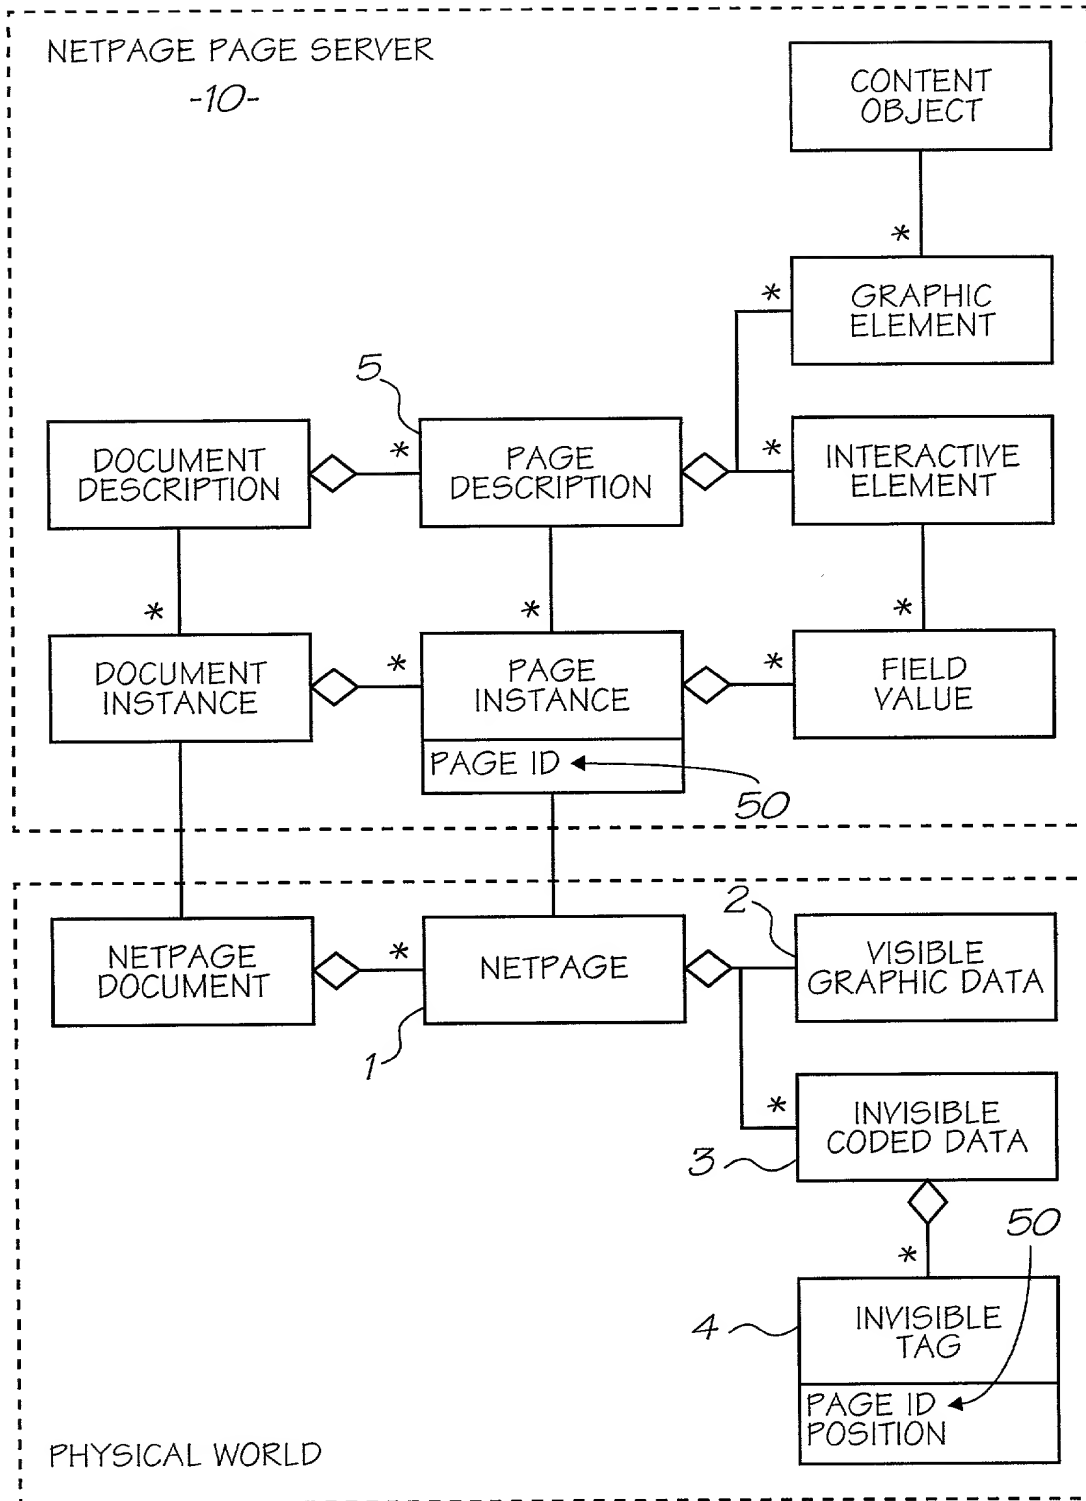


FIG. 3

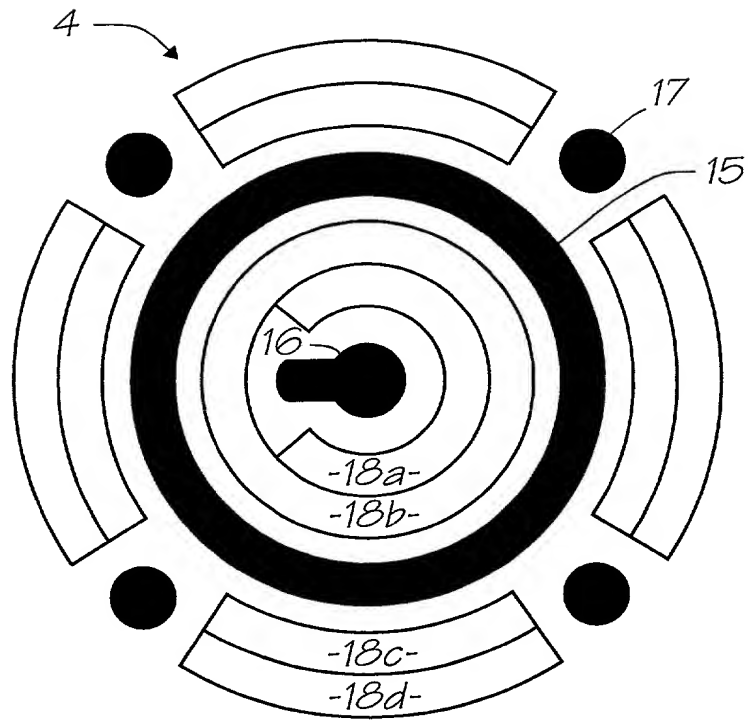


FIG. 4a

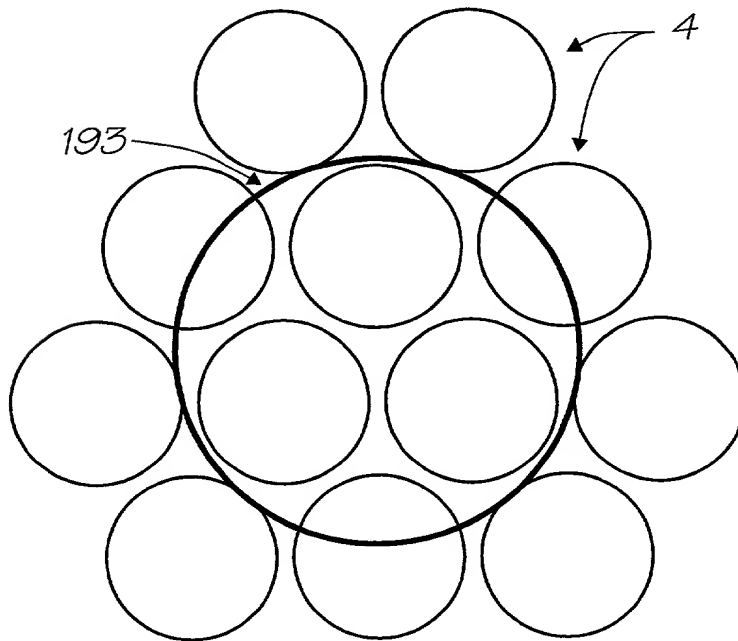


FIG. 4b

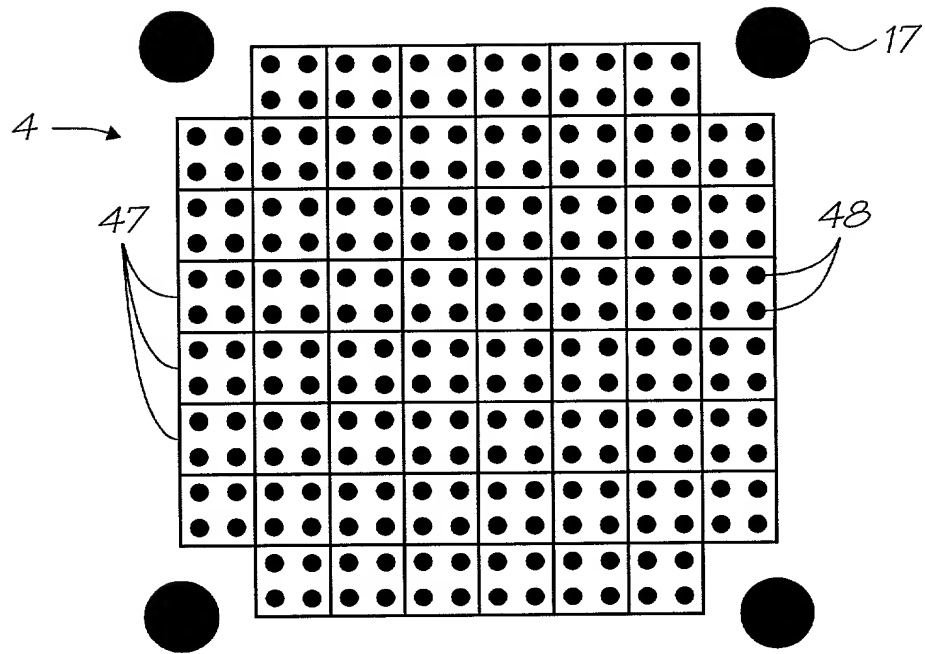


FIG. 5a

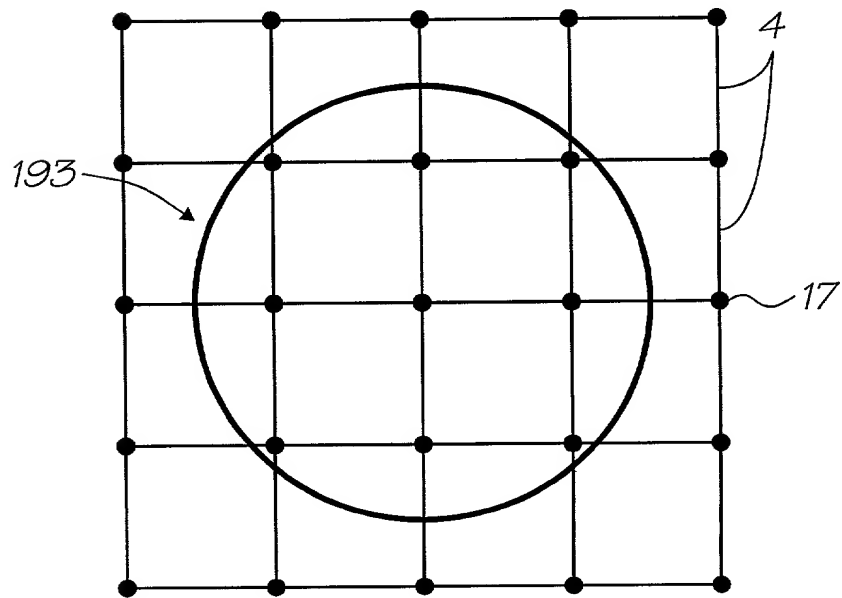


FIG. 5b

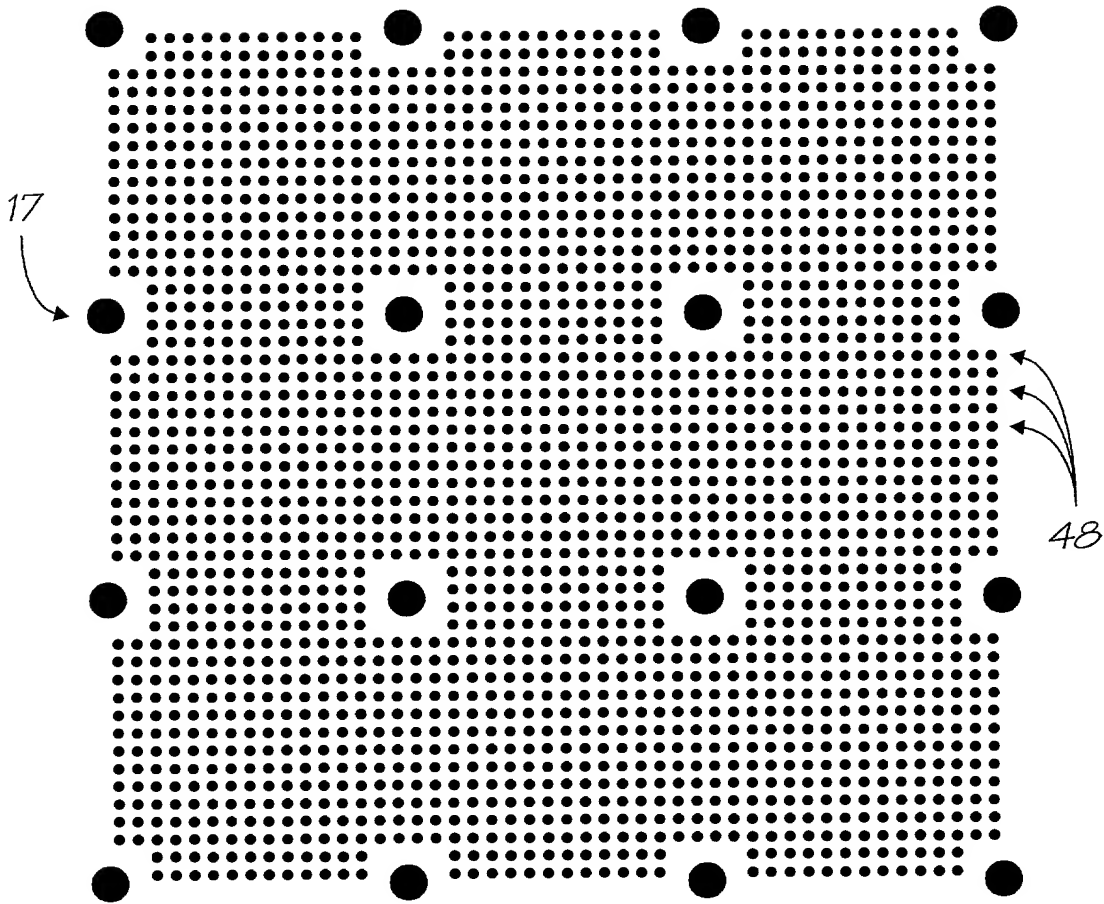


FIG. 5c

47

		1A	4G	1B	4K	1C	4Q	
	0E	2L	NZ	2H	MZ	2D	7E	2A
	4C	1D	4F	1E	4J	1F	4N	1G
	4E	2M	2J	2I	2E	2H	2B	
	4B	1H	4F	1I	4J	1J	4M	1K
	3G	2N	3F	2J	3E	2F	3D	2C
	4A	1I	4D	1M	4H	1N	4P	1O
		2O	3C	2K	3B	2G	3A	

FIG. 5d

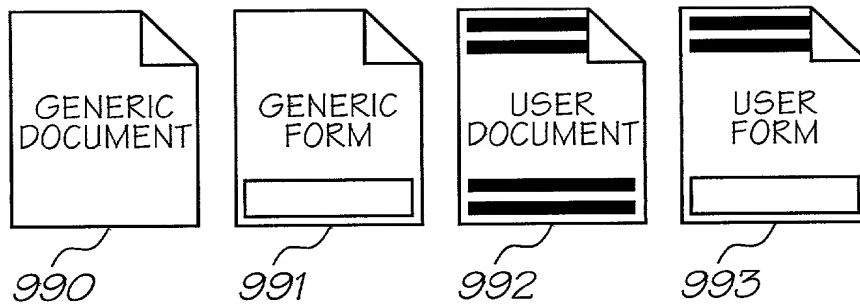


FIG. 6

FIXED INFORMATION ~ 994

VARIABLE INFORMATION ~ 995

COMMAND BUTTON ~ 996

INPUT FIELD ~ 997

DRAGGABLE COMMAND ~ 998

FIG. 7

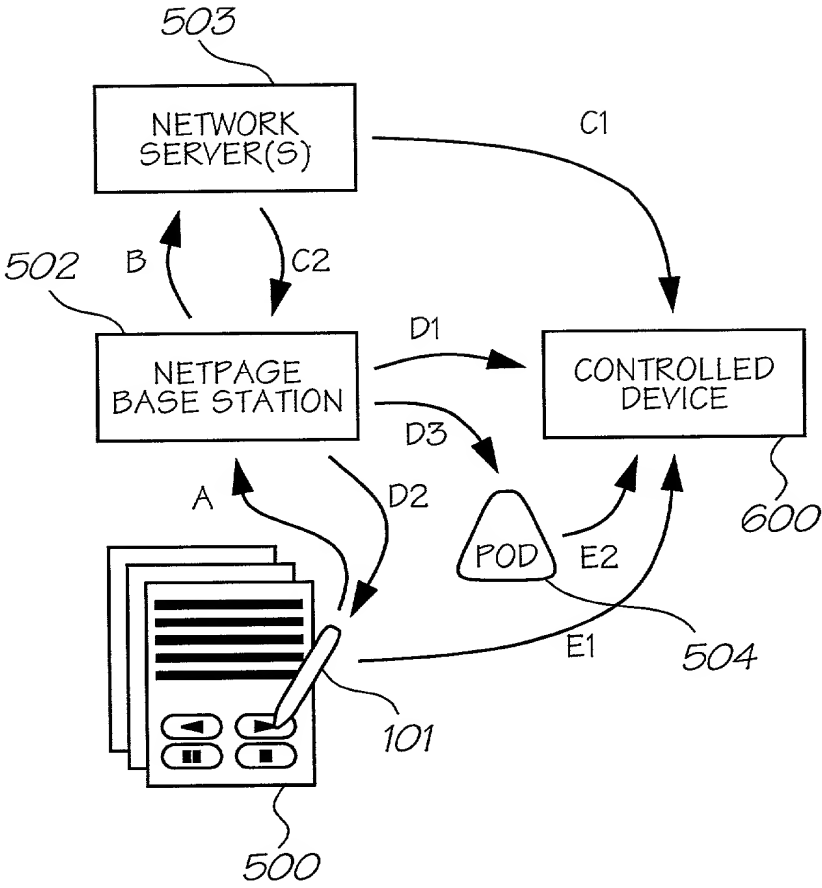


FIG. 8

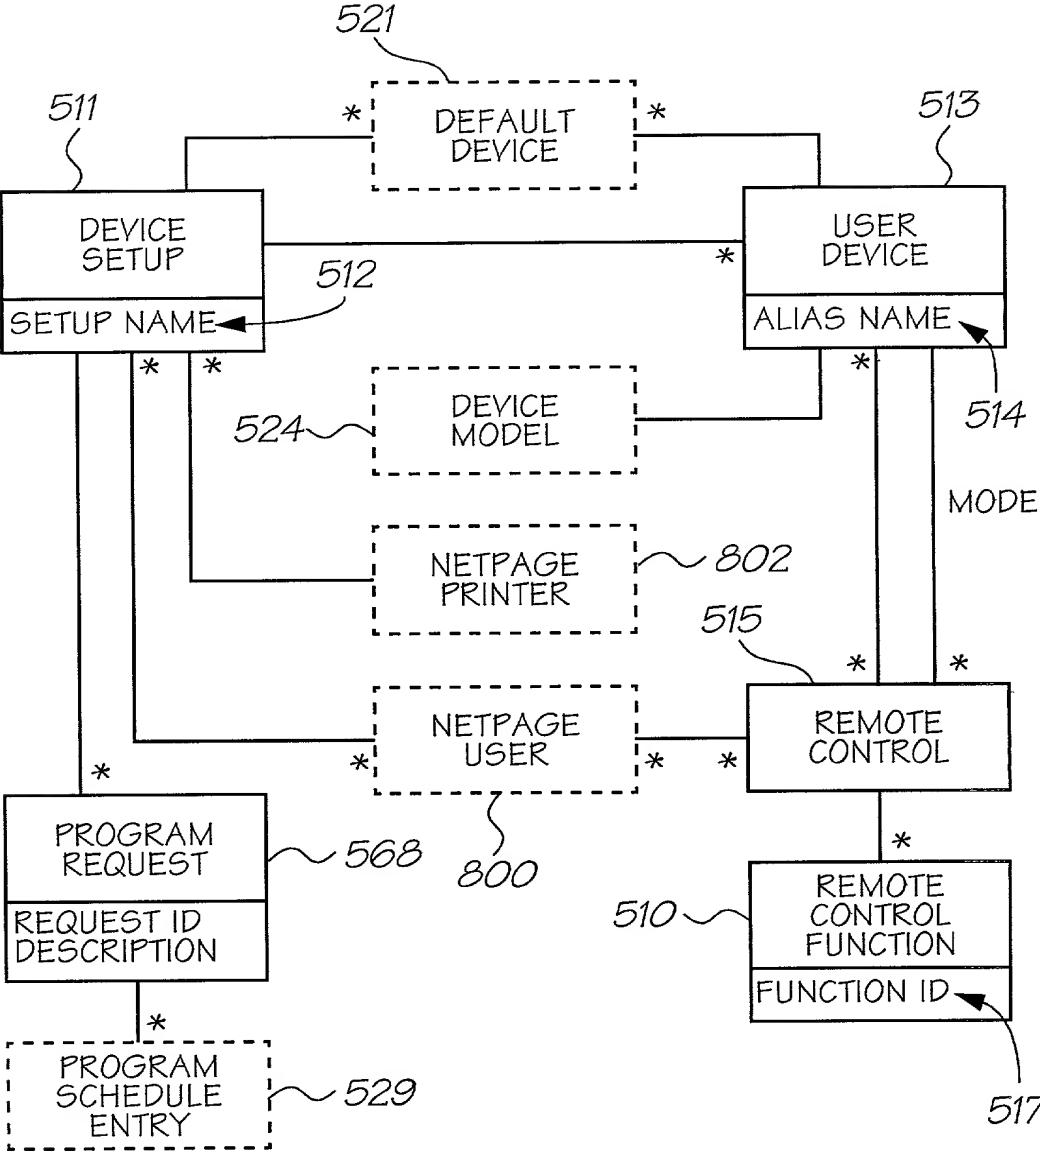


FIG. 9

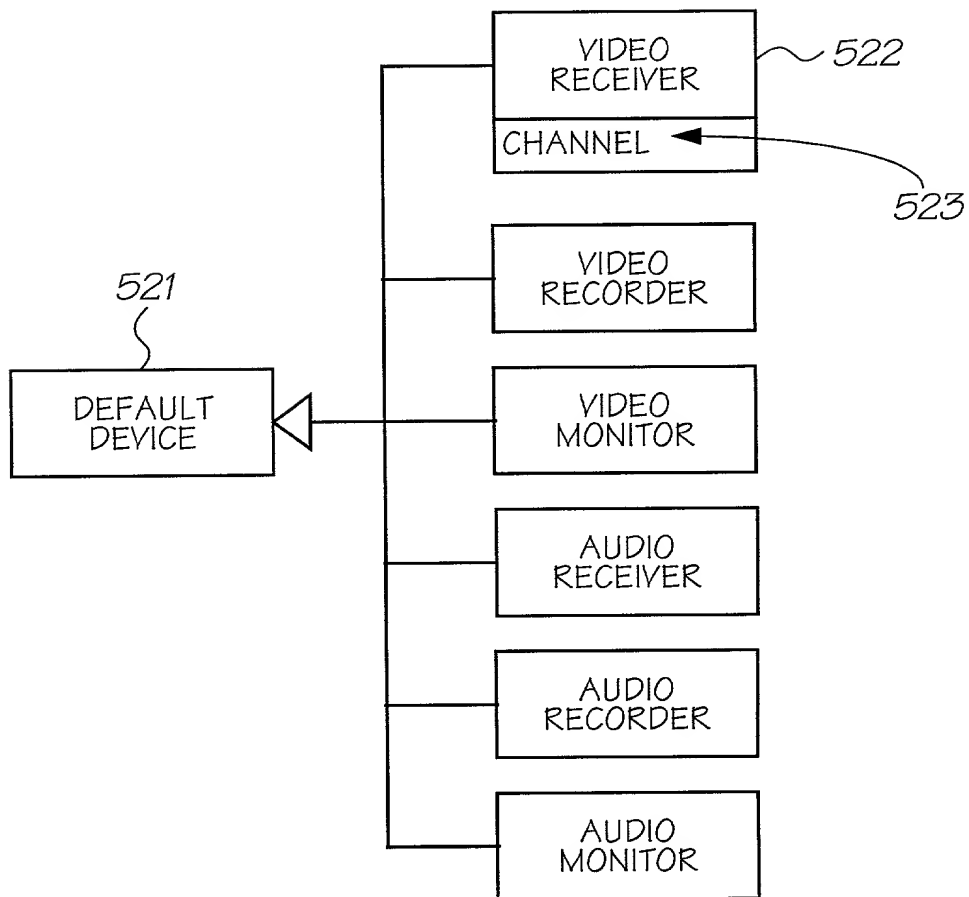


FIG. 10

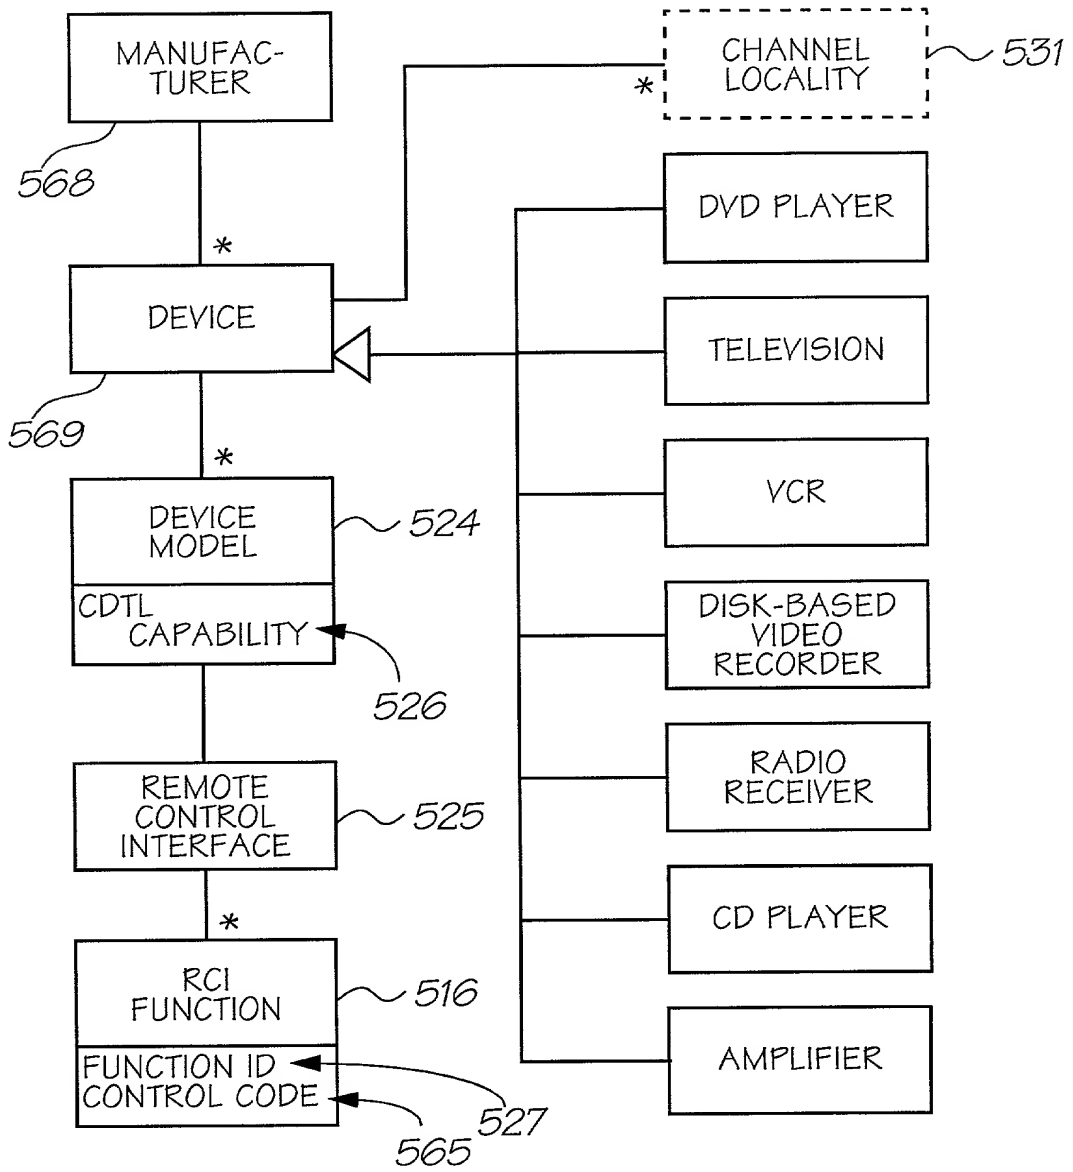


FIG. 11

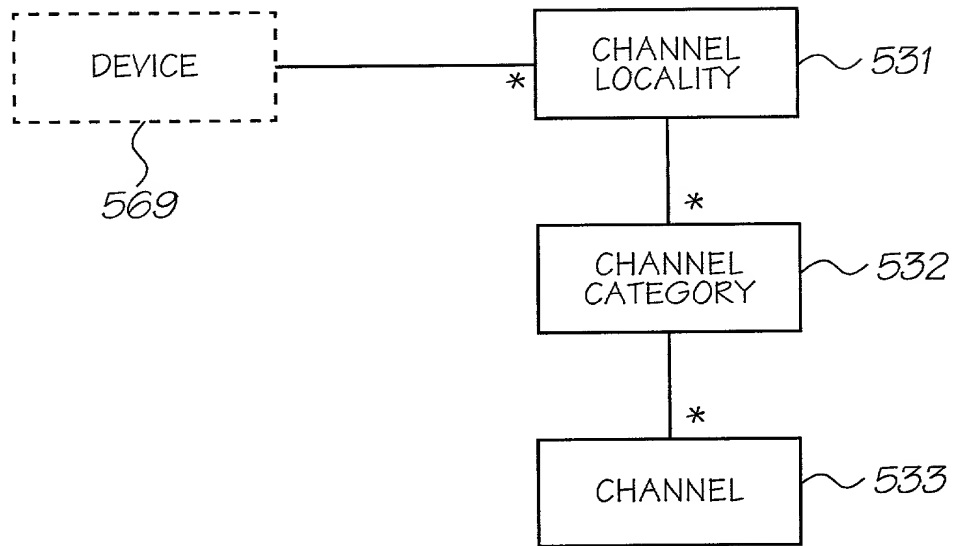


FIG. 12

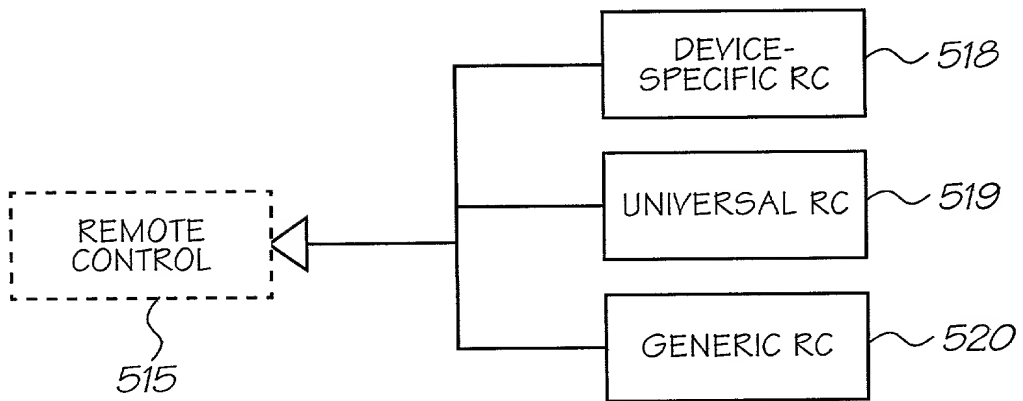


FIG. 13

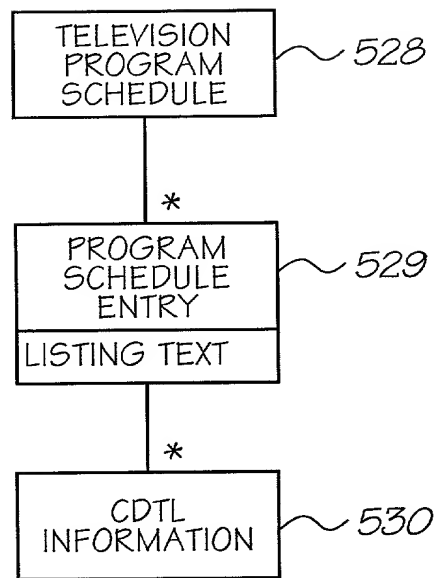


FIG. 14

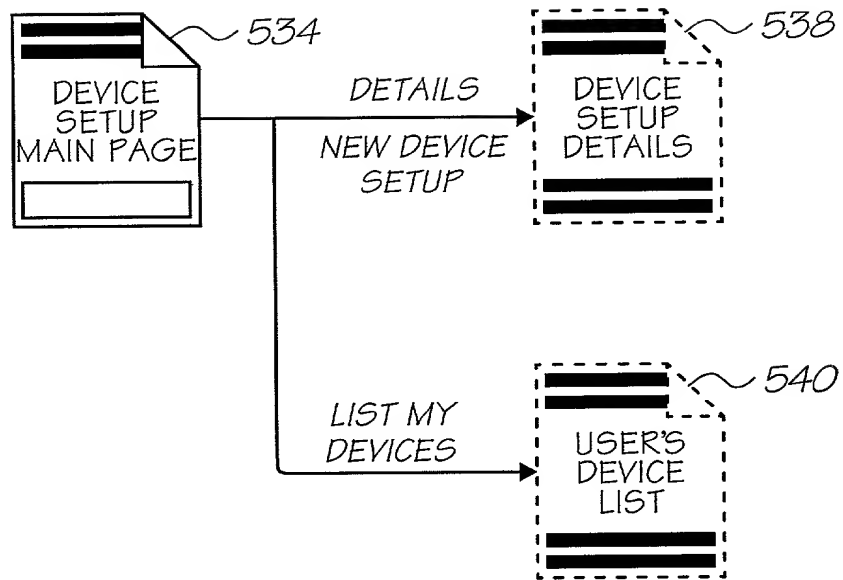


FIG. 15

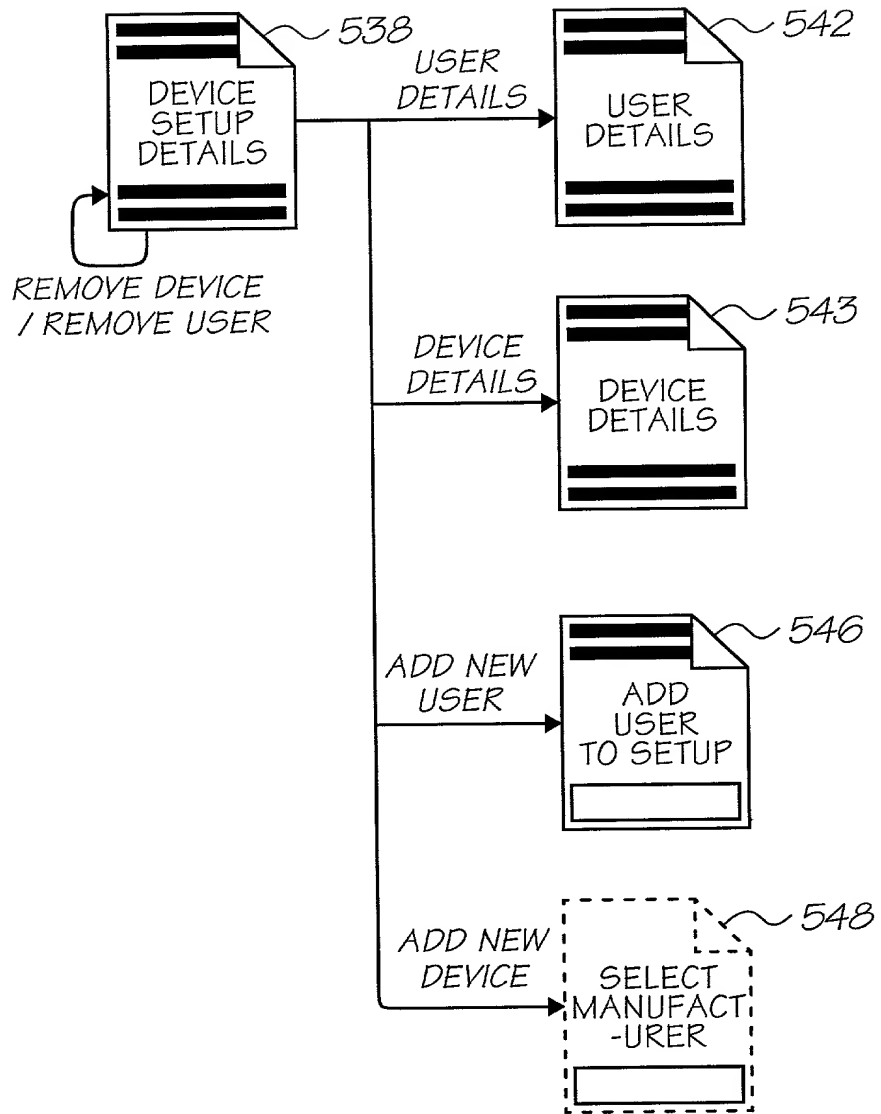


FIG. 16

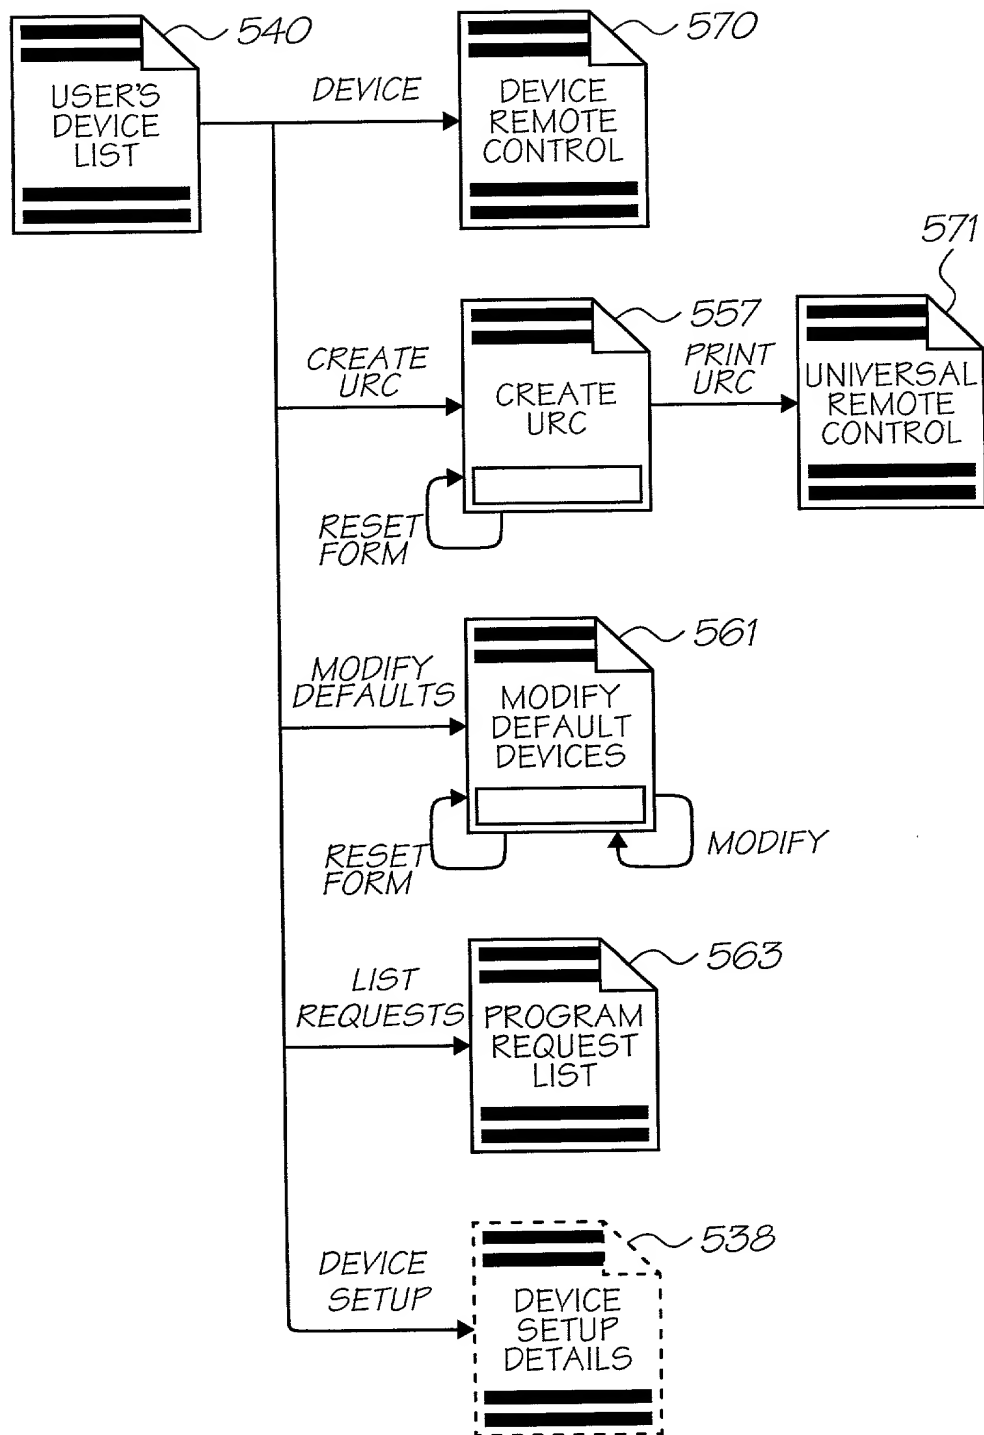


FIG. 17

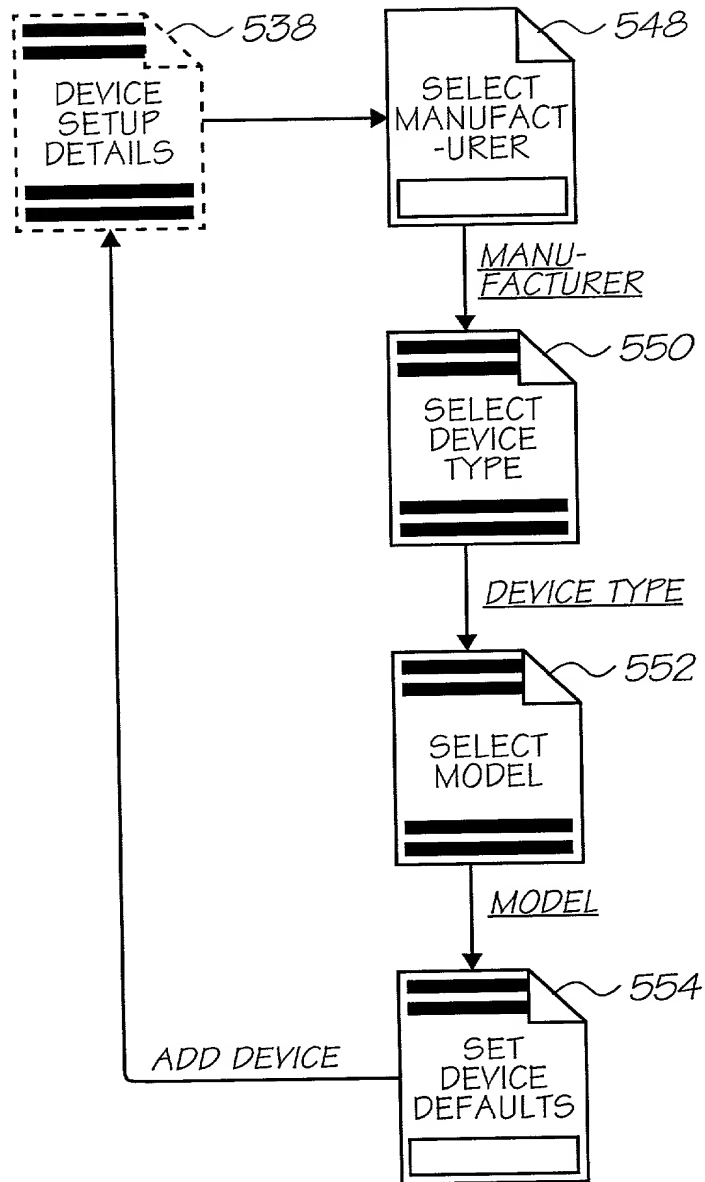


FIG. 18

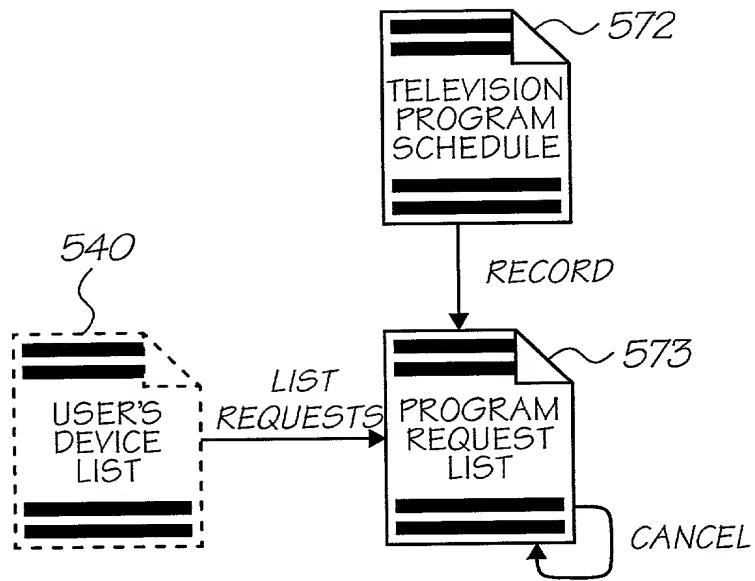


FIG. 19

DEVICE SETUP MAIN PAGE PAGE 1 OF 1

CURRENT DEVICE SETUPS FOR THIS PRINTER:

DETAILS 535	SETUP NAME	USER NAME
		USER NAME

DETAILS	SETUP NAME	USER NAME
		USER NAME

CLICK ON DETAILS (ABOVE) TO VIEW OR MODIFY DEVICE SETUP
OR
ENTER SETUP NAME (BELOW) TO CREATE NEW DEVICE SETUP

SETUP NAME 536	NEW DEVICE SETUP 537
-------------------	-------------------------

534

539 LIST MY DEVICES

FIG. 20

DEVICE SETUP DETAILS PAGE 1 OF 1

SETUP NAME

REGISTERED USERS:

USER NAME	DETAILS	REMOVE
USER NAME	DETAILS	REMOVE
}		
USER NAME	DETAILS	REMOVE

541

544

ADD NEW USER

545

DEVICES:

DEVICE ALIAS	DETAILS	REMOVE
DEVICE ALIAS	DETAILS	REMOVE
}		
DEVICE ALIAS	DETAILS	REMOVE

541

544

ADD NEW DEVICE

547

538

FIG. 21

DEVICE LIST FOR USER NAME PAGE 1 OF 1

PRESS A DEVICE BUTTON TO PRINT A REMOTE CONTROL PAGE

DEVICE ALIAS	DEFAULT VIDEO RECORDER
DEVICE ALIAS	DEFAULT VIDEO MONITOR
DEVICE ALIAS	TELEVISION

} }

DEVICE ALIAS

CREATE URC CREATE UNIVERSAL REMOTE CONTROL

556

562 LIST REQUESTS

560 MODIFY DEFAULTS

559 DEVICE SETUP

540

FIG. 22

CREATE UNIVERSAL REMOTE CONTROL PAGE 1 OF 1

CURRENT DEVICE SETUP: SETUP NAME

CHECK DEVICES REQUIRED ON UNIVERSAL REMOTE CONTROL

<input type="checkbox"/>	DEVICE ALIAS	DEVICE TYPE
<input type="checkbox"/>	DEVICE ALIAS	DEVICE TYPE
	}	}
<input type="checkbox"/>	DEVICE ALIAS	DEVICE TYPE

558

PRINT URC

557

RESET FORM

FIG. 23

DEVICE ALIAS

REMOTE CONTROL

PAGE 1 OF 1

DATE & TIME

TV / VIDEO

POWER ON/OFF

1

2

3

4

5

6

7

8

9

0

- / --

MUTE

+

VOLUME

-

+

CHANNEL

-

REPRINT

PRINT TV PROGRAM

LIST DEVICES

FIG. 24

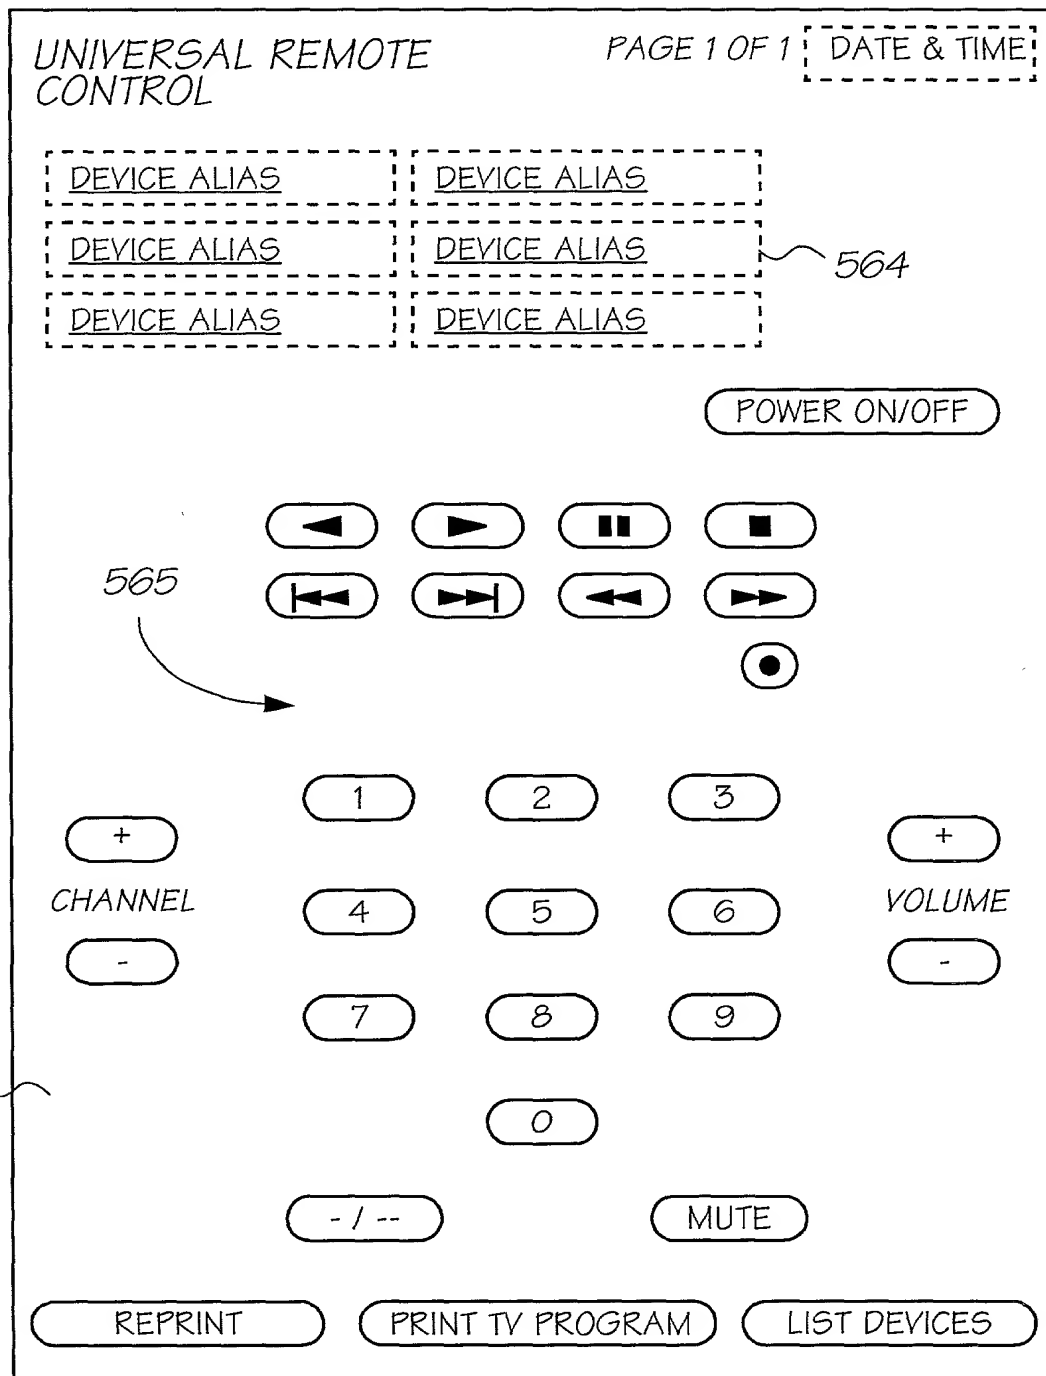


FIG. 25

SELECT MANUFACTURER

PAGE 1 OF #	TRAN NBR
-------------	----------

ADDING NEW DEVICE TO SETUP: SETUP NAME

SELECT MANUFACTURER OF DEVICE

MANUFACTURER
MANUFACTURER
MANUFACTURER
...
MANUFACTURER

549

548

FIG. 26

SELECT DEVICE TYPE PAGE 1 OF 1 TRAN NBR

ADDING NEW DEVICE TO SETUP: SETUP NAME

SELECT MANUFACTURER DEVICE TYPE

TELEVISION

VCR

DVD PLAYER

AMPLIFIER

CD PLAYER

DISK-BASED VIDEO REC

RADIO RECEIVER

550

551

FIG. 27

SELECT MODEL OF DEVICE PAGE 1 OF # TRAN NBR

ADDING NEW DEVICE TO SETUP: SETUP NAME

SELECT MODEL OF MANUFACTURER DEVICE TYPE

MODEL

MODEL

MODEL

}

MODEL 553

552

FIG. 28

SET DEVICE DEFAULTS PAGE 1 OF # TRAN NBR

ADDING NEW DEVICE TO SETUP: SETUP NAME

ENTER DEVICE ALIAS FOR

MANUFACTURER	DEVICE TYPE	MODEL
--------------	-------------	-------

ALIAS DEVICE ALIAS

DO YOU WANT THIS TO BE YOUR DEFAULT

DEFAULT DEVICE TYPE ?	YES
DEFAULT DEVICE TYPE ?	<input type="checkbox"/>
DEFAULT DEVICE TYPE ?	<input type="checkbox"/>
DEFAULT DEVICE TYPE ?	<input type="checkbox"/>
}	
DEFAULT DEVICE TYPE ?	<input type="checkbox"/>

(CHECK ALL THAT APPLY)

554

555 ADD DEVICE

FIG. 29

TELEVISION PROGRAM SCHEDULE
FOR

DATE

DATE & TIME

PAGE 1 OF #

PROGRAM LISTING ENTRY

REC

PROGRAM LISTING ENTRY

REC

566

567

572

FIG. 30

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63) <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing OR <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	Attorney Docket Number	<i>NPA059US</i>
	First Named Inventor	<i>PAUL LAPSTUN</i>
	COMPLETE IF KNOWN	
	Application Number	<i>/</i>
	Filing Date	
	Group Art Unit	
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

METHOD AND SYSTEM FOR DEVICE CONTROL

the specification of which (Title of the Invention)

☒ is attached hereto
OR
☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
<i>PQ4392</i>	<i>Australia</i>	<i>12-01-1999</i>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement. This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

☐ Customer Number

OR

☐ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.


Direct all correspondence to: ☒ Customer Number
or Bar Code Label

24011

OR ☒ Correspondence address below

Name	Kia Silverbrook				
Address	Silverbrook Research Pty Ltd				
Address	393 Darling Street				
City	Balmain	State	NSW	ZIP	2041
Country	Australia	Telephone	61-2-9818-6633	Fax	61-2-9818-6711

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.



Name of Sole or First Inventor:		<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle (if any))			Family Name or Surname		
PAUL			LAPSTUN		
Inventor's Signature					Date
					Oct. 18, 2000
Residence: City	Rodd Point	State	NSW	Country	Australia
				Citizenship	Norwegian
Post Office Address	13 Duke Avenue				
Post Office Address					
City	Rodd Point	State	NSW	ZIP	2046
				Country	Australia

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → ☐PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION**ADDITIONAL INVENTOR(S)**
Supplemental Sheet
Page 1 of 1

Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
JACQUELINE ANNE				LAPSTUN			
Inventor's Signature						Date	Oct. 18, 2000
Residence: City	Rodd Point	State	NSW	Country	Australia	Citizenship	Australian
Post Office Address	13 Duke Avenue						
Post Office Address							
City	Rodd Point	State	NSW	ZIP	2046	Country	Australia
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
KIA				SILVERBROOK			
Inventor's Signature						Date	Oct. 18, 2000
Residence: City	Balmain	State	NSW	Country	Australia	Citizenship	
Post Office Address	393 Darling Street						
Post Office Address							
City	Balmain	State	NSW	ZIP	2041	Country	Australia
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.